

# PLATFORMS

LUXURY VINYL

## RIGID CORE CONSTRUCTION OPTIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	6 x 36 inches, 6 x 48 inches, 7 x 48 inches, 7 x 60 inches, 9 x 60 inches
Overall Thickness	4.5 mm, 5.0 mm or 6.0 mm
Attached Pad	Optional Pad
Wear Layer	8 mil, 12 mil, 20 mil, 28 mil, or 30 mil
Finish Coat	UV Cured Polyurethane or Ceramic Bead Enhanced
Texture	Embossed
Edge Profile	Square Edge or Eased Edge
Packaging	Varies depending on above

### Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring

### Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore SCS Certified


Phthalate Free

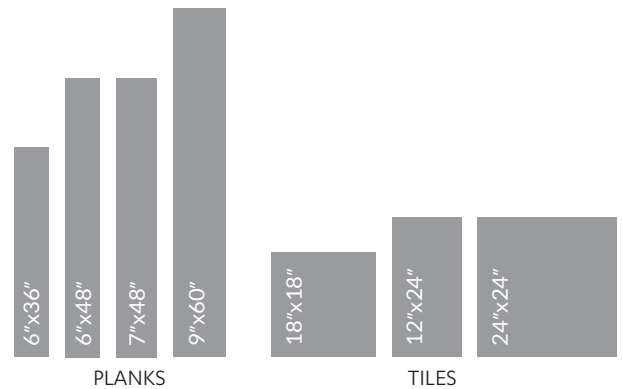

### RIGID CORE STANDARD THICKNESS OPTIONS



### WEAR LAYER THICKNESS OPTIONS

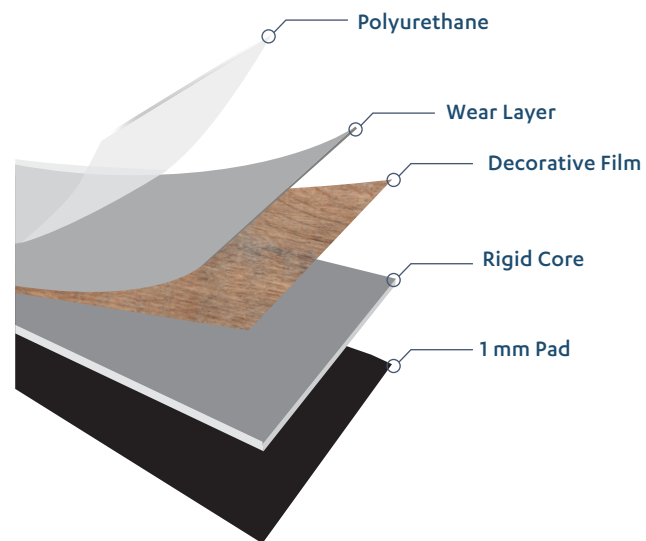

### Warranty

Choose your warranty options; Adhesive, Primer, Sub-floor Leveling / Patch, Acoustical Underlay or no warranty.

