

CARRINGTON



WATERPROOF LAMINATE | 8 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	7.75" Wide x 48" Long, (195 mm x 1215 mm)
Overall Thickness	10 mm (Includes 2.0 mm Pad)
Attached Pad	2.0 mm IXPE
Wear Layer	AC4 Rated
Texture	Embossed-In-Register
Edge Profile	4-Sided Painted Bevel
Packaging	20.4 sf/ctn, 8 pcs/ctn, 30 lbs/ctn, 60 ctn/plt, 1224 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS Certified

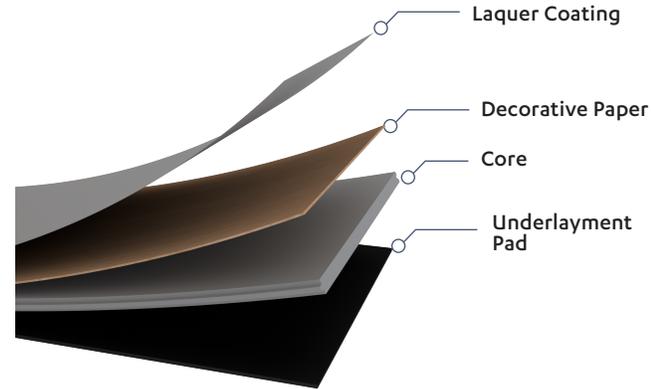

Warranty

Waterproof, 10 Year Limited Commercial, 10 Year Multifamily, Lifetime Residential

Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-mold, Q Nose

Layout Options:

