



# EXPEDITION

GLUE DOWN | 2.0 MM, 12 MIL

**TAS**  
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

# EXPEDITION

GLUE DOWN | 2.0 MM, 12 MIL



## SCRATCH RESISTANCE

The Expedition Collection features a standard 2 mm overall thickness and a 12 mil polyurethane wear layer which provides protection against scratches and daily wear and tear with minimal maintenance.



## LIGHT COMMERCIAL

The Expedition Collection is designed to perform in multi-family and other light commercial areas, making it an ideal choice for spaces with moderate foot traffic.



## NATURAL COLOR PALETTE

With beautiful visuals representing woods found in the Pacific Northwest, the Expedition Collection provides a cost-effective flooring solution for light commercial spaces without sacrificing style.

*All styles available in a SPC 5.0 MM, 12 MIL Construction through the compliment collection.*

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**FJORD**  
GLUE DOWN

**WILV1308**  
2.0 MM | 12 MIL



**CORTEZ**  
GLUE DOWN

**WILV1302**  
2.0 MM | 12 MIL



**SPICE ROAD**  
GLUE DOWN

**WILV1303**  
2.0 MM | 12 MIL



**NORWOOD**  
GLUE DOWN

**WILV1301**  
2.0 MM | 12 MIL



**SALATHE**  
GLUE DOWN

**WILV1304**  
2.0 MM | 12 MIL



**HALF DOME**  
GLUE DOWN

**WILV1305**  
2.0 MM | 12 MIL



**STONEBROOK**  
GLUE DOWN

**WILV1306**  
2.0 MM | 12 MIL

# EXPEDITION



GLUE DOWN | 2.0 MM, 12 MIL

|                   |                                                                    |
|-------------------|--------------------------------------------------------------------|
| Construction      | Luxury Vinyl Tile                                                  |
| Classification    | ASTM F1700, Class III, Type B                                      |
| Dimensions        | 7" Wide x 48" Long, 177.8 mm x 1220 mm                             |
| Overall Thickness | 2.0 mm                                                             |
| Wear Layer        | 12 mil                                                             |
| Finish Coat       | Polyurethane                                                       |
| Texture           | Embossed                                                           |
| Edge Profile      | Micro-Bevel                                                        |
| Packaging         | 35.023 sf/ctn, 15 pcs/ctn, 28.4 lbs/ctn, 2451.6 sf/plt, 70 ctn/plt |

## Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as Fresh Floors by TAS Flooring.


Recommended Adhesive: -Dynamic, Transitional Pressure Sensitive, firm set  
-Pinnacle, Premium Transitional Pressure Sensitive, hard set

## Test Method & Requirements

|                                                 |            |                  |
|-------------------------------------------------|------------|------------------|
| Solid Vinyl Floor Tile                          | ASTM F1700 | Pass             |
| Flexibility                                     | ASTM F137  | Pass             |
| Thickness                                       | ASTM F386  | Pass             |
| Wear Layer Thickness                            | ASTM F410  | Pass             |
| Resistance to Heat Color Change                 | ASTM F1514 | Pass             |
| Resistance to Light Color Change                | ASTM F1515 | Pass             |
| Residual Indentation                            | ASTM F1914 | Pass             |
| Size & Squareness                               | ASTM F2199 | Pass             |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit                               | ASTM F970  | Pass > 250 LBS   |
| Flammability/Radiant Flux                       | ASTM E648  | Class I          |
| Smoke Density                                   | ASTM E662  | Pass             |

## Health & Environmental

FloorScore SCS Certified  
Phthalate-Free

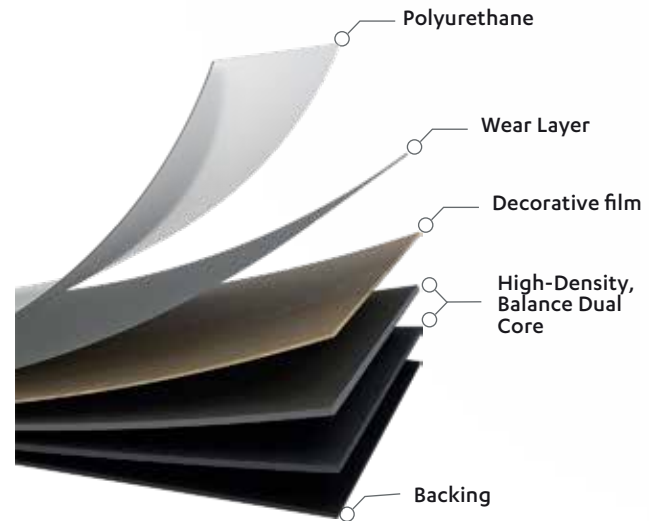

## Warranty


5 Years Light Commercial, 25 Years Multifamily Residence Units, 25 Years Residential

## Accessories


[QNose](#) Stair Nosing

## Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER



Additional specifications, full installation instructions & warranty information available online at [TASCONTRACT.COM](https://TASCONTRACT.COM)

A division of [TAS supply company, Inc.](#)



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.