



AUDACITY EDISON

AC4 | 10 MM + 2.0 MM

TAS
CONTRACT

TASCONTRACT.COM

AUDACITY EDISON

AC4 | 10 MM + 2.0 MM



WATERPROOF LAMINATE CONSTRUCTION

Built to perform in active residential and light commercial environments, Edison features durable 12 mm construction and a waterproof core for added peace of mind.



AC4-RATED WEAR PROTECTION

With a high-performance AC4 wear layer, this collection resists everyday wear, scratches, and impact—making it a smart choice for high-use spaces.



REALISTIC WOOD AESTHETIC

Embossed-in-register texture and 4-sided painted bevels create an authentic wood visual, adding depth and detail to interior designs.



ENHANCED COMFORT & SOUND CONTROL

A pre-attached 2 mm IXPE pad delivers acoustic insulation and underfoot cushioning, improving livability in multi-unit and open-plan environments.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





GATEWAY
WATERPROOF LAMINATE

CHAUDL072
10 MM + 2.0 MM



SAGE
WATERPROOF LAMINATE

CHAUDL080
10 MM + 2.0 MM



SKIPPER
WATERPROOF LAMINATE

CHAUDL083
10 MM + 2.0 MM



SORRELL
WATERPROOF LAMINATE

CHAUDL098
10 MM + 2.0 MM



GOLDENROD
WATERPROOF LAMINATE

CHAUDL113
10 MM + 2.0 MM



DOUGLAS
WATERPROOF LAMINATE

CHAUDL115
10 MM + 2.0 MM



OLSO
WATERPROOF LAMINATE

CHAUDL117
10 MM + 2.0 MM

AUDACITY EDISON [®]

The Fearless Waterproof Laminate Floor

WATERPROOF LAMINATE | 10 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	9" Wide x 60" Long (231 mm x 1525 mm)
Overall Thickness	12 mm (Includes 2.0 mm IXPE Pad)
Attached Pad	2.0 mm IXPE Pad attached
Surface Finish	AC4 Rated
Texture	Embossed-In-Register
Edge Profile	4-Sided Painted Bevel
Packaging	26.52 sf/ctn, 7 pcs/ctn, 51 lbs/ctn, 44 ctn/plt, 1167 sf/plt

Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Carb Phase II Compliant

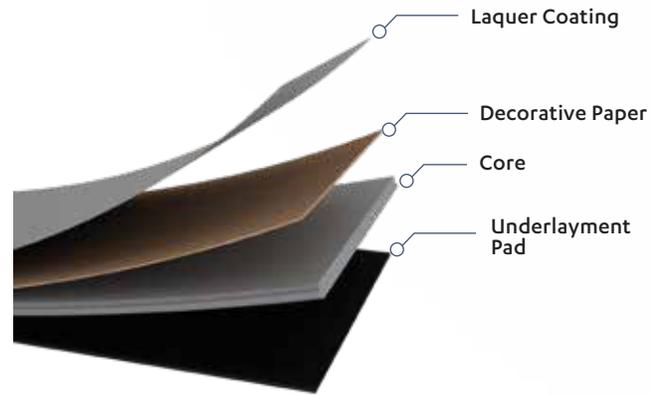

Warranty


Waterproof, 15 Year Light Commercial, Lifetime Residential

Accessories


Quarter Round, Reducer, Stair nose, T-Mold, [QNoise](#) Stair nose

Layout Options:

NOT TO SCALE



ASHLAR



STAGGER

TAS

CONTRACT

TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.