

EVC | 7.5 MM, 20 MIL



**Acacia** | JBTANDEMACAAT



**Ashford** | JBTANDEMASH




**Dover** | JBTANDEMDOV



**Glasgow** | JBTANDEMGLA




**Norwich** | JBTANDEMNR

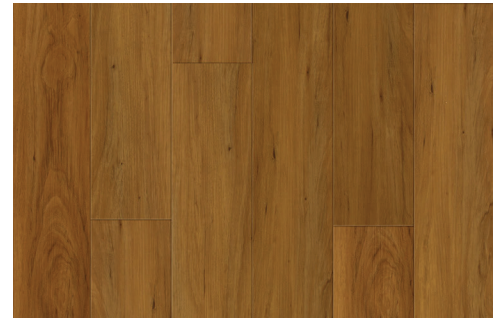

**Oban** | JBTANDEMOBA



**Rockport** | JBTANDEMROC

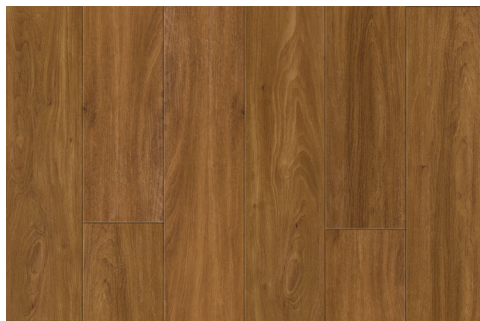

**Sussex** | JBTANDEMSUS

## SPECIFICATIONS

Construction	Engineered Vinyl Click (EVC) Waterproof Core
Classification	ASTM F3261, Class III, Type B
Dimensions	5.75" Wide x 48" Long, 146 mm x 1217 mm
Overall Thickness	7.5 mm (includes 2.0 mm EVA pad)
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane, Super Protect Coating
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	15.30 sf/carton - 84 carton/pallet - 1285.2 sf/pallet
Installation	Angle / Angle
Warranty	30 Yr Residential, 10 Yr Light Commercial, 10 Yr Multi-Family



## INSTALLATION FAST FACTS

- Transitions required in rooms over 25' x 35' or 875 sf
- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Hydro Radiant Heat approved (≤ 85°F)
- Minimum 3500 PSI for Concrete/Cypcrete Substrates

Read Complete Instructions Before Installing



tasflooring.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**