



EXPLORER

GLUE DOWN | 5.0 MM, 20 MIL

TAS
CONTRACT

TASCONTRACT.COM

EXPLORER

GLUE DOWN | 5.0 MM | 20 MIL | 7" X 48"




MINIMAL TRANSITION

Explorer's 5mm overall thickness allows for minimal transitions to carpet and tile.



CERAMIC ENHANCED COATING

High-density polyurethane with an enhanced ceramic coating to provide scratch resistance 20 mil commercial wear layer.



NON-SLIP BACKING

20 mil wear layer provides a long lasting and durable wear resistance. Suitable for light commercial and residential applications.

Q Nose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



Residential Only



CLARK
SPC RIGID CORE

DJLV0302Z
5.0 MM | 20 MIL



COLOMBUS
SPC RIGID CORE

DJLV0301Z
5.0 MM | 20 MIL



DRAKE
SPC RIGID CORE

DJLV0303Z
5.0 MM | 20 MIL



COOK
SPC RIGID CORE

DJLV0309
5.0 MM | 20 MIL



PIKE
SPC RIGID CORE

DJLV0304
5.0 MM | 20 MIL



SHACKLETON
SPC RIGID CORE

DJLV0308
5.0 MM | 20 MIL

EXPLORER



GLUE DOWN | 5.0 MM, 20 MIL

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	7.25" Wide x 48" Length, 177.8 mm x 1219.2 mm
Overall Thickness	5.0 mm (includes Rubber Back)
Attached Pad	No Skid Acoustical Rubber Back
Wear Layer	20 mil
Finish Coat	High Density Polyurethane with Enhanced Ceramic Coating
Texture	Embossed
Edge Profile	4-Sided Square Edges
Packaging	23.35 sf/carton, 50 carton/pallet, 1167.5 sf/pallet

Installation & Maintenance

Glue Down, Loose Lay

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as Fresh Floors by TAS Flooring.

Recommended Adhesives: WF Taylor - Dynamic, Transitional Pressure Sensitive
- Pinnacle, Premium Traditional Pressure Sensitive
- Resolute, Premium Multi-Functional Adhesive


Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore Certified # SCS-FS-05749

Phthalate Free

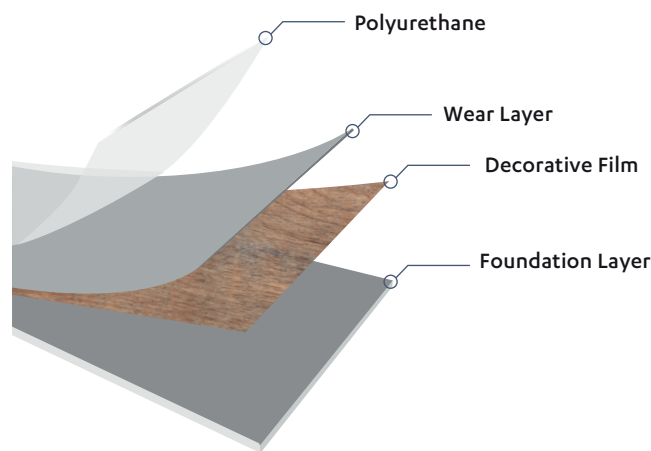


Warranty

15 Year Light Commercial, 15 Year Multi-Family,
Limited Lifetime Residential

Accessories

[QNose](#) Stair Nosing

Layout Options:

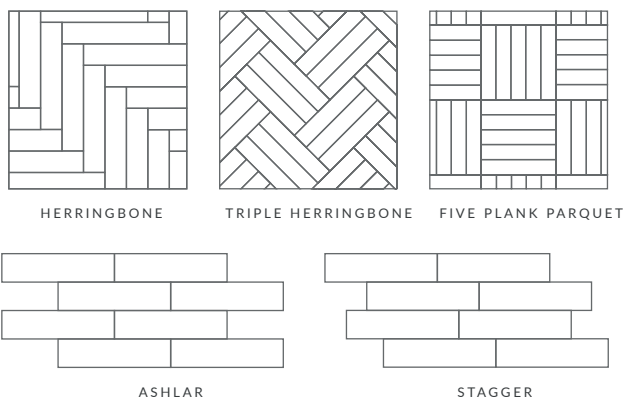

Additional specifications, full installation instructions & warranty information available online at TASCONTRACT.COM

A division of [TAS supply company, Inc.](#)





TAS
CONTRACT
TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.