

LAGUNA PLANK

TAS
FLOORING


HARDWOOD | 7/16" THICK



Baha | HFTALP7651OBH



Cadiz | HFTALP7651OCZ

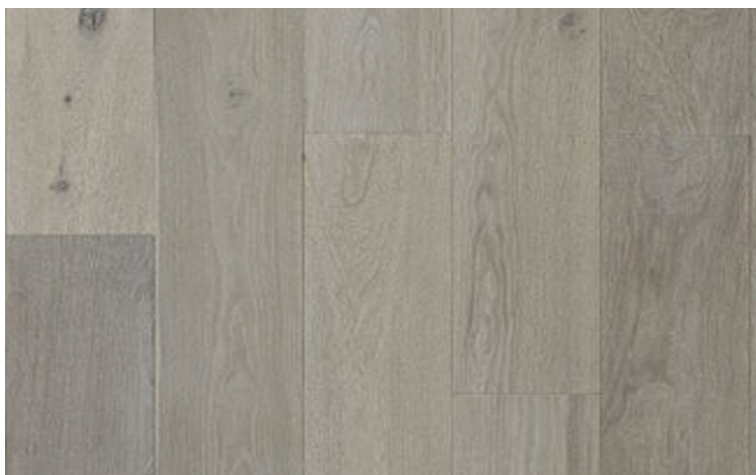

Marbel | HFTALP7651OMR



Sana | HFTALP7651OSN

SPECIFICATIONS

Construction	Engineered Multi-ply Core
Species	Engineered European White Oak
Dimensions	6.5" wide, Multi-lengths up to 67"
Overall Thickness	7/16"
Attached Pad	N/A
Veneer Thickness:	1.5 mm
Surface Finish	Gloss, UV Cured Urethane Coating
Design Feature	Thermal Enhanced, Brushed
Edge Profile	4-Sided Micro Bevel
Packaging	43 lbs/ctn; 33.6 sf/ctn; 54 ctn/plt; 1814.4 sf/plt

INSTALLATION FAST FACTS

- Acclimate product to normal room conditions
- Moisture Content: Is recommended 7% to 9% (Not to exceed 11%)
- Relative Humidity: 40%-55%
- Expansion Space: 7/16" gap
- Recommended Room Temp: 65° F -75° F after install

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & [QNOSE](#)**



Additional specifications, full installation instructions & warranty information available online at tascontract.com

TAS
CONTRACT

TAS supply company, Inc.