

HOME DESTINY



WATERPROOF LAMINATE | 12 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	9.25" Wide x 60" Long (238 mm x 1515 mm)
Overall Thickness	14 mm (Includes 2.0 mm Pad)
Attached Pad	2.0 mm
Wear Surface	AC4 Rating
Texture	Embossed In Register
Edge Profile	4-Sided Painted Bevel
Packaging	19.41 sf/ctn, 5 pcs/ctn, 44.4 lbs/ctn, 52 ctn/plt, 1009.3 sf/plt

Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Carb Phase II Compliant

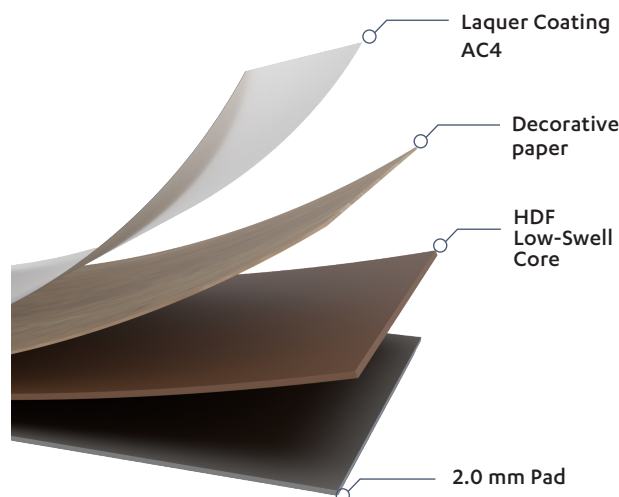

Warranty


Topical Waterproof, Lifetime Residential, 15 Year Light Commercial and Multifamily Common Areas

Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNose](#) Stair Nose

Layout Options:

NOT TO SCALE



ASHLAR



STAGGER