



LOCAL LEGEND

CARPET TILE









The Local Legends Series draws inspiration from the timeless textiles of vintage menswear and nostalgic upholstery fabrics. The series offers four distinct carpet tile patterns that evoke a sense of classic refinement and visual warmth while featuring beautifully coordinated hues. The Local Legends Series radiates sophistication and enduring charm.



BETTER FOR PEOPLE AND PLANET

Our future depends on the work we do today. Our commitment to our planet extends beyond just products and processes: it’s how we challenge ourselves to do and be better every day, how we make decisions, how we reinvest in our people and our planet, and how we define what matters most as we work to deliver value for generations to come.



Declare Red List Free Health Product Declaration Green Label Plus Certification

We are proud to provide products free of Red List chemicals with verified documentation of their impact throughout the lifecycle, with Green Label Plus certification for better indoor air quality.



UL Certified EPD

An Environmental Product Declaration, or EPD, is a document that transparently communicates the environmental performance or impact of a product or material over its lifetime.




ECOFLEX MATRIX

SUSTAINABLE CARPET TILE BACKING

We continue our dedication to sustainable solutions with EcoFlex Matrix, the next generation in carpet tile backing. Using advanced materials and patent pending engineering, EcoFlex Matrix lowers environmental impact without sacrificing performance. EcoFlex Matrix simplifies floor preparation and installation, greatly reduces sub-floor moisture concerns, and is easier to ship and handle.

PERFORMANCE	SUSTAINABILITY
- Provides permanent dimensional stability - Tiles are impervious to moisture damage from spills and water extraction cleaning - Up to Lifetime Limited Carpet Tile Warranty for: Wear, Static Protection, Edge Raveling/ Zippering, Delamination, Dimensional Stability*	- EcoFlex Matrix is manufactured using less energy than other carpet tile products - Polyolefin backing contains no plasticizers - Contains a minimum of 40% pre-consumer recycled content based on total product weight*** - CRI Green Label Plus certified - Declare Red List Free - Recyclable - Able to ship more per box resulting in a lower environmental impact from transportation
INSTALLATION	
- Simplifies complex floor preparation with no need to encapsulate old adhesives** - Greatly reduces sub-floor moisture concerns and saves money on mitigation - Superior construction offers reliability for the life of your installation	

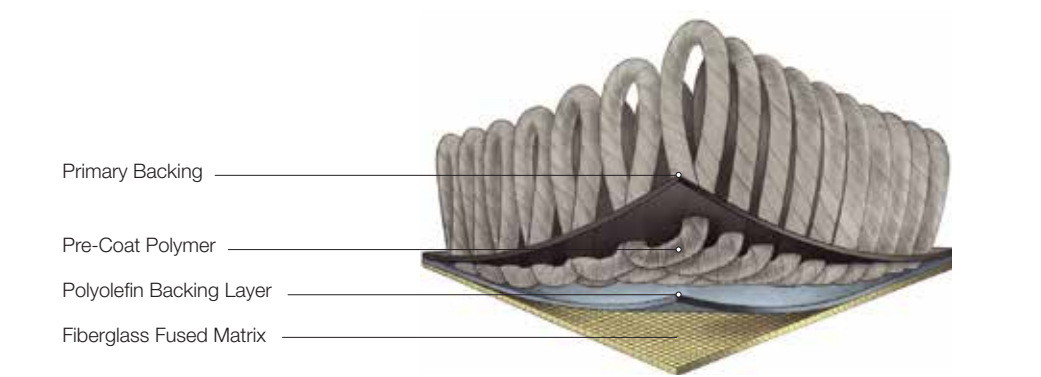

Lifetime or 10 Year Limited Warranty varies by fiber type. Please see specifications for details
***Recycled content claim third party verified by UL (Underwriters Laboratory)

COLORSTRAND FIBER

For over 15 years, Colorstrand fiber has continually exceeded the demanding expectations of our customers for their projects. With the design flexibility and color intensity of solution dyed fiber, Colorstrand delivers lasting beauty and value. And, Colorstrand has the added benefit of third party SCS Global Services certified 30% recycled content.

PERFORMANCE

- n Unsurpassed colorfastness to light, atmospheric contaminants, and harsh cleaning agents in Colorstrand SD
- n Sentry Plus Soil® and Stain Protector keeps your investment looking newer longer
- n Can be engineered to achieve the most severe TARR ratings

BUDGET

- n Internally extruded fiber allows cost control of products
- n Numerous broadloom and modular products available at value engineered budgets

SUSTAINABILITY

- n Colorstrand contains a minimum of 30% pre-consumer recycled content by total weight*
- n Products tufted with Colorstrand are CRI Green Label Plus® certified for VOC emissions
- n Recyclable through ReCover Program

DESIGN

- n A wide variety of colors for excellent design flexibility

SERVICE

- n Locally stocked in Kent, WA. Providing what you need when you need it
- n 100% vertically integrated providing unsurpassed lead times and service reliability

*Recycled content claim third party verified by SCS Global Services

CROSSROADS WAY

SPECIFICATIONS

CARPET TILE

Brand	TAS Flooring
Collection	Local Legend Collection
Style Name / Number	Crossroads Way
Construction	Tufted
Surface Appearance.	Textured Patterned Loop
Gauge	1/12 (47.00 rows per 10 cm)
Density	6,923
Dye Method	100% Solution Dyed
Fiber Type	Colorstrand® SD Nylon
Stain Release Technology	Protection Plus Stain
Soil Release Technology	Protection Plus Soil
Primary Backing	Non Woven Synthetic
Secondary Backing	UltraSet® Matrix
Indoor Air Quality	Green Label Plus Certified #1171
NSF 140	Gold
Size	24" x 24" (.6096 m x .6096 m)
Yds/Ctn	10.66 sq yd/ctn
Installation Method	Quarter Turn / Brick Ashlar
Flammability	Vertical Ashlar / Multi-Directional
Smoke Density	ASTM E 648 Class 1 (Glue Down)
Static Propensity	ASTM E 662 Less than 450
Warranties	AATCC-134 Under 3.5 KV
	Lifetime Limited Wear Warranty
	Lifetime Limited Static Protection Warranty
	Lifetime Limited Carpet Tile Warranty for Wear, Edge
	Raveling/Zippering, Delamination, and
	Dimensional Stability
	Lifetime Limited Colorfastness to Light Warranty
	10 Year Limited Stain Resistance Warranty
	10 Year Limited Colorfastness to Atmospheric Contaminants

Installation Instructions:

Vertical Ashlar



Brick Ashlar



Quarter Turn



Multi-Directional



HAWK | TACROHAW



GULL | TACROGUL



WOODPECKER | TACROWOO



ROBIN EGG | TACROROB



OWL | TACROOWL



RAVEN | TACRORAV

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

STOREFRONT MARKET

SPECIFICATIONS

CARPET TILE	Brand	TAS Flooring
	Collection	Local Legend Collection
	Style Name / Number	Storefront Market
	Construction	Tufted
	Surface Appearance	Textured Patterned Loop
	Gauge	1/12" (47.00 rows per 10 cm)
	Density	6,585
	Dye Method	100% Solution Dyed
	Fiber Type	Colorstrand® SD Nylon
	Stain Release Technology	Protection Plus Stain
	Soil Release Technology	Protection Plus Soil
	Primary Backing	Non Woven Synthetic
	Secondary Backing	UltraSet® Matrix
	Indoor Air Quality	Green Label Plus Certified # 100055
	Size	24" x 24" (.6096 m x .6096 m)
	Yds./Ctn	10.66
	Installation Method	Monolithic / Vertical Ashlar / Brick Ashlar Quarter Turn / Multi-Directional
	Flammability	ASTM E 648 Class 1 (Glue Down)
	Smoke Density	ASTM E 662 Less than 450
	Static Propensity	AATCC-134 Under 3.5 KV
	Warranties	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants

Installation Instructions:

Vertical Ashlar



Brick Ashlar



Quarter Turn



Multi-Directional



HAWK | TASTOHAW



GULL | TASTOGUL



WOODPECKER | TASTOWOO



ROBIN EGG | TASTOROB



OWL | TASTOOWL



RAVEN | TASTORAV

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.

PARKWAY PLAZA

SPECIFICATIONS

CARPET TILE

Brand	TAS Flooring
Collection	Local Legend Collection
Style Name / Number	Parkway Plaza
Construction	Tufted
Surface Appearance	Textured Patterned Loop
Gauge	1/12" (47.00 rows per 10 cm)
Density	7,297
Dye Method	100% Solution Dyed
Fiber Type	Colorstrand® SD Nylon
Stain Release Technology	Protection Plus Stain
Soil Release Technology	Protection Plus Soil
Primary Backing	Non Woven Synthetic
Secondary Backing	UltraSet® Matrix
Indoor Air Quality	Green Label Plus Certified # 100055
Size	24" x 24" (.6096 m x .6096 m)
Yds./Ctn	10.66
Installation Method	Monolithic / Vertical Ashlar / Brick Ashlar / Quarter Turn / Multi-Directional
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Warranties	Lifetime Limited Wear Warranty Lifetime Limited Static Protection Warranty Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Warranty Lifetime Limited Colorfastness to Light Warranty 10 Year Limited Stain Resistance Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants

Installation Instructions:

Vertical Ashlar



Brick Ashlar



Quarter Turn



Multi-Directional



HAWK | TAPARHAW



GULL | TAPARGUL



WOODPECKER | TAPARWOO



ROBIN EGG | TAPARROB



OWL | TAPAROWL



RAVEN | TAPARRAV

These patterns contain inherent characteristics which may result in pattern run off and/or pattern appearance variations at the seams or tile edges (darker or lighter pattern lines). These characteristics are inherent in the patterns and are not manufacturing defects. Consideration to these characteristics should be given when selecting an installation method.



LOCAL LEGEND

CARPET TILE