

TANDEM ESSENCE

WPC | 7.5 MM, 20 MIL

TAS CONTRACT

TASCONTRACT.COM

TANDEM ESSENCE

WPC | 7.5 MM, 20 MIL








WPC CONSTRUCTION

Built with a durable Wood Plastic Composite core and virgin PVC, Tandem Essence offers enhanced dimensional stability and dependable performance for multifamily environments.

ADVANCED SURFACE PROTECTION

Standard gloss polyurethane with an Adamantine Finish™, provides superior scratch, stain, and wear resistance with minimal maintenance.

QUIET & COMFORTABLE UNDERFOOT

Manufactured ortho-phthalate free, delivering a safer, low-VOC option that supports healthier indoor spaces without compromising performance.

COMFORT & ACOUSTIC SUPPORT

Thicker polymer composite core and attached pad provides underfoot comfort and improved sound absorption for active lifestyles and busier residential spaces.

TRIMS & TRANSITIONS

- T-Mold
- Quarter Round
- Reducer
- Star Noise
- Endcap
- QNose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



QNose

FULL INSTALLATION INSTRUCTIONS, MAINTENANCE, AND WARRANTY INFORMATION ARE AVAILABLE AT TASCONTRACT.COM



ATLANTIS
LUXURY VINYL

DGWP0401
7.5 MM | 20 MIL



BAYLIS
LUXURY VINYL

DGWP0402
7.5 MM | 20 MIL



ALLISON
LUXURY VINYL

DGWP0403
7.5 MM | 20 MIL



WINTHROP
LUXURY VINYL

DGWP0404
7.5 MM | 20 MIL



BELVEDERE
LUXURY VINYL

DGWP0405
7.5 MM | 20 MIL



HAWKE
LUXURY VINYL


DGWP0406
7.5 MM | 20 MIL

TANDEM ESSENCE

TAS FLOORING

WPC | 7.5 MM, 20 MIL

Construction	WPC Vinyl Click, Wood Plastic Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	7" Wide x 60" Long (178 mm x 1500 mm)
Overall Thickness	7.5 mm (Includes 2 mm Pad)
Attached Pad	2.0 mm
Wear Layer	20 mil
Finish Coat	Adamantine Finish™
Texture	Random Embossed-In-Register
Edge Profile	Micro-Bevel
Packaging	22.99 sf/ctn, 8 pcs/ctn, 29.45 lbs/ctn, 75 ctn/plt, 1724.25 sf/plt

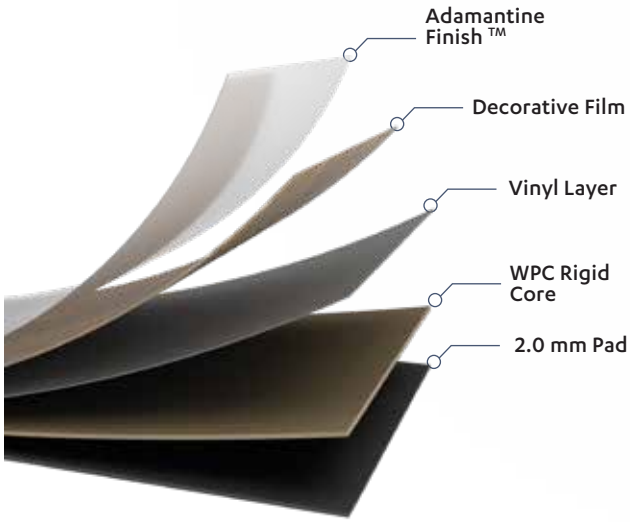

Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition Required for rooms Larger than: (50) L x (50) W

Ambient & Surface: Acclimate product to environment.
Work out of multiple boxes. Subfloors dry and flat (3/16" in 10')
Hydroponic Radiant Heat Systems only

Maintenance: No Polish, Fresh Floors by TAS Flooring

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Phthalate Free


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
QNose Stair Nosing

Layout Options:

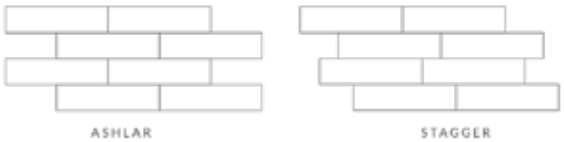

floor score SCScertified

PHTHALATE FREE

Hydronic Heat

Floating Angle/Angle

TAS CONTRACT

Additional specifications, full installation instructions & warranty information available online at **TASCONTRACT.COM**

A division of TA supply company, Inc.



TAS CONTRACT

TASCONTRACT.COM

PLATFORMS

LUXURY VINYL

Scan the QR Code to view Platforms, our TAS Contract custom flooring program.