

# MONUMENT

LAMINATE 8 MM + 2 MM EVA ATTACHED PAD



**Cabrillo** | SCLA0101




**McHenry** | SCLA0102




**Stanwick** | SCLA0103



**Newberry** | SCLA0104

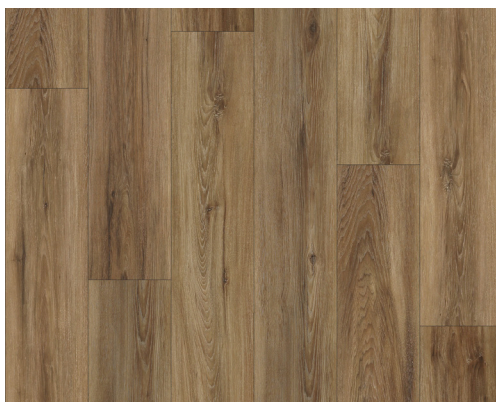

**Russell** | SCLA0105

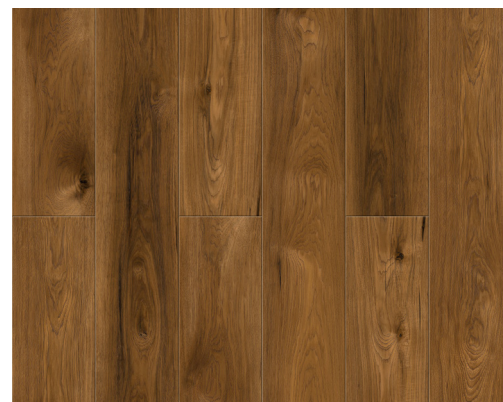

**Waco** | SCLA0107

## SPECIFICATIONS

Construction	Waterproof Laminate Floor
Dimensions	9.5" Wide x 60" Long
Overall Thickness	10 mm (includes 2 mm pad)
Wear Surface	AC4
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Installation	Angle/Angle
Warranty	Lifetime Residential, 15 Yr Light Commercial, 15 Yr Multi-Family
Packaging	31.31 sf/carton - 44 carton/pallet - 1377.6 sf/pallet

## INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Max room size up to 66' x 66' with 1/2" expansion space
- Transition molding required at rooms which join irregularly or are heated unevenly
- Subfloors dry and flat (3/16" in 10')
- Installation on or below grade concrete requires 6 mil moisture barrier

Read Complete Instructions Before Installing



tasflooring.com

SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE

