

## ABA LSPC | 7.5 MM, 20 MIL

Construction	LSPC Rigid Core, Light Stone Polymer Composite
Classification	ASTM F3261
Dimensions	9" Wide x 60" Long, 226 mm x 1517 mm
Overall Thickness	7.5 mm (includes 1.5 mm pad)
Attached Pad	1.5 mm IXPE Pad
Wear Layer	20 mil
Finish Coat	Adamantine Finish™
Texture	Embossed-In-Register
Edge Profile	4-Sided Pressed Bevel
Packaging	29.52 sf/ctn, 8 pcs/ctn, 53.3 lbs/ctn, 40 ctn/plt, 1,180.8 sf/plt

### Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50)  
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, TAS Flooring Fresh Floors


### Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore® program by SCS Global Services  
Phthalate-Free

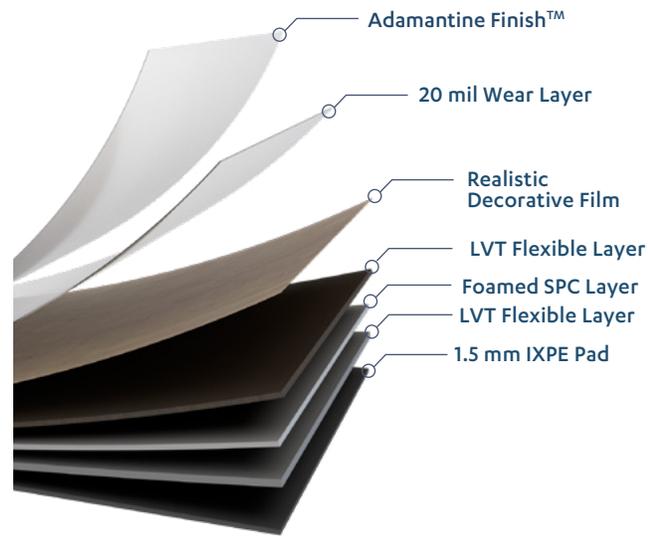

### Warranty

10 year Light commercial, 10 year Multifamily, 30 year residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

### Layout Options:

