

SPC | 6.0 MM, 22 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261
Dimensions	7" Wide x 60" Long, 180 mm x 1524 mm 7" Wide x 56" Long, 180 mm x 1420 mm*
Overall Thickness	6.0 mm (Includes 1.0 mm IXPE Pad)
Attached Pad	1.0 mm IXPE Pad
Wear Layer	22 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed-In-Register
Edge Profile	Pressed Bevel
Packaging	60" Planks - 23.62 sf/ctn, 8 pcs/ctn, 50 lbs/ctn, 45 ctn/plt, 1069.2 sf/plt 56" Plank - 24.76 sf/ctn, 10 pcs/ctn, 51.5 lbs/ctn, 45 ctn/plt, 1114.2 sf/plt*

Installation & Maintenance

Angle / Angle

Layout Room size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	72
Sound Transmission Class STC	ASTM E90*	73

*Acoustical ratings shown are based on the most representative assembly. IIC, STC, HIIC, and Low IIC results are dependent upon the specific floor/ceiling assembly. Please contact your representative for detailed test reports or assembly information.

Health & Environmental

FloorScore® program by SCS Global Services

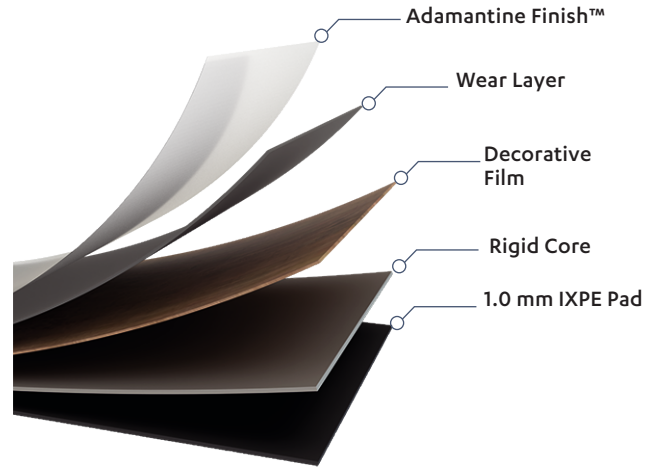


Warranty

10 Year Light Commercial, 10 Year Multifamily,
30 Year Residential


Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-Mold, [QNose](#)

Layout Options:



ASHLAR



STAGGER