



ARTESIAN WOOD

GLUE DOWN | 3.0 MM, 20 MIL

TAS

CONTRACT

TASCONTRACT.COM

ARTESIAN WOOD

GLUE DOWN | 3.0 MM, 20 MIL | 7" X 60"



SUPERIOR STABILITY

Featuring an AB-core structure, the Artesian Collection offers enhanced dimensional stability. The innovative five-roller co-extrusion process seamlessly molds the layers, reducing vertical deflection and improving overall stability, making it ideal for residential, multifamily and commercial applications.



ECO-FRIENDLY

Made from PVC and natural stone powder, this collection is free from radioactive elements and harmful gasses. The plastic molding process ensures zero formaldehyde release, providing a phthalates-free and environmentally safe flooring solution.



100% WATERPROOF

The Artesian Collection is completely waterproof, with no affinity for water due to its main components of PVC and stone powder. It resists mildew in wet conditions, making it a reliable choice for areas prone to moisture.



HIGH FIRE RESISTANCE

With a fire resistance rating of up to B1 level, second only to marble, the Artesian Collection doesn't burn and helps prevent the spread of flames. It does not generate toxic gasses in the case of a structure fire.



ANTI-SKID SURFACE

Designed for safety, this flooring features a super anti-skid surface. Compared to ordinary flooring materials, it offers stronger foot friction, reducing the risk of slipping even on wet floors.

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.




QNoise



BYRON
LUXURY VINYL TILE

WILV0101
3.0 MM | 20 MIL



MELODY
LUXURY VINYL TILE

WILV0102
3.0 MM | 20 MIL



LAYTON
LUXURY VINYL TILE

WILV0103
3.0 MM | 20 MIL



ASHWORTH
LUXURY VINYL TILE

WILV0104
3.0 MM | 20 MIL



SOLSTICE
LUXURY VINYL TILE

WILV0105
3.0 MM | 20 MIL



HOBART
LUXURY VINYL TILE

WILV0106
3.0 MM | 20 MIL



TARA
LUXURY VINYL TILE

WILV0107
3.0 MM | 20 MIL

ARTESIAN WOOD



GLUE DOWN | 3.0 MM, 20 MIL

Construction	Luxury Vinyl Tile
Classification	ASTMF 1700, Class III, Type B
Dimensions	7" long x 60" wide, 177.8 mm x 1524 mm
Overall Thickness	3.0 mm
Wear Layer	20 mil
Finish	B1+ Scratch Resist/Antimicrobial Coating
Texture	Embossed
Edge Profile	Micro Bevel
Packaging	43.75 sf/ctn, 15 pcs/ctn, 55.3 lbs/ctn, 50 ctn/plt, 2187.5 sf/plt

Installation & Maintenance

Glue Down

Transition: Transition required for rooms larger than 45' W x 45' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS Certified

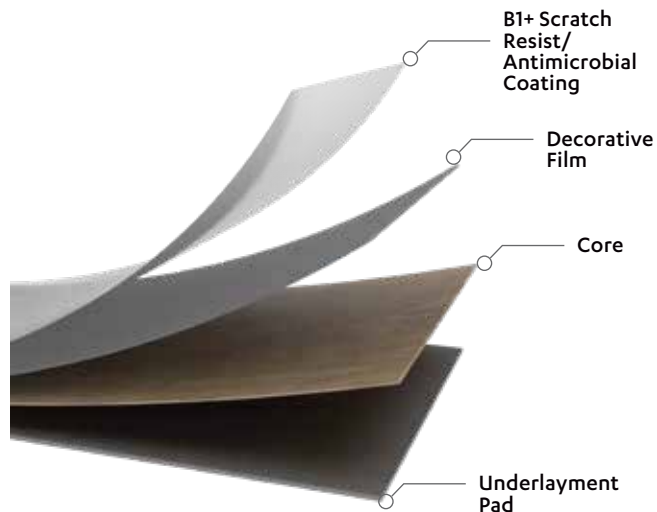


Warranty

10 Year Commercial, 10 Year Multifamily Common Areas
30 Year Residential, 30 Year Multifamily Residence Areas

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

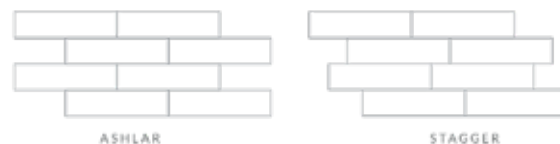

Up to 45' x 45'

TAS
CONTRACT

TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.