

GLUE DOWN | 5.0 MM, 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700
Dimensions	7.25" Wide x 48" Long, 184 mm x 1219 mm
Overall Thickness	5.0 mm (includes 1.5 mm EVA Pad)
Wear Layer	12 mil
Finish Coat	UV-Polyurethane
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	24.16 sf/ctn, 10 pcs/ctn, 65 ctn/plt, 1570.4 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, TAS Flooring Fresh Floors

Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set
- Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements


Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Slip Resistance	DIN 51130	Angle: 18.7° Rating: R10

Sound Testing

IIC Result	61
Assembly	150mm Slab with Drop Ceiling
Testing Standard	ASTM E492-09 / ASTM E989-12

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

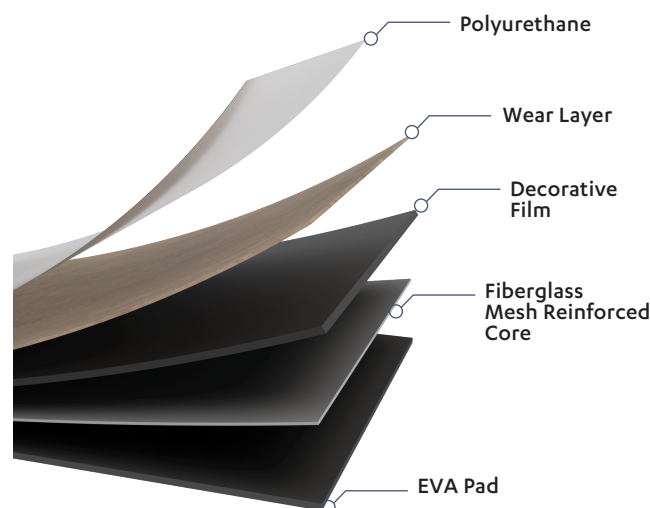

Warranty


5 Year Light Commercial & Multi-Family Common Area,
25 Year Residential & Multi-Family Residence Units

Accessories


[QNose](#) Stair Nosing

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER