

GLUE DOWN | 3.5 MM, 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	3.5 mm (includes 1.0 mm Pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	32.67 sf/ctn, 14 pcs/ctn, 30.4 lbs/ctn, 50 ctn/plt, 1633.5 sf/plt

Installation & Maintenance

Glue Down

Expansion & Transition: Temperature range of 60°F - 85°F

Maintenance: No Polish, Fresh Floors by TAS Flooring.


Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	
Impact Insulation Class IIC	ASTM E492*	63
Sound Transmission Class STC	ASTM E90*	61

*Acoustical ratings shown are based on the most representative assembly. IIC, STC, HIIC, and Low IIC results are dependent upon the specific floor/ceiling assembly. Please contact your representative for detailed test reports or assembly information.

Health & Environmental

FloorScore Certified

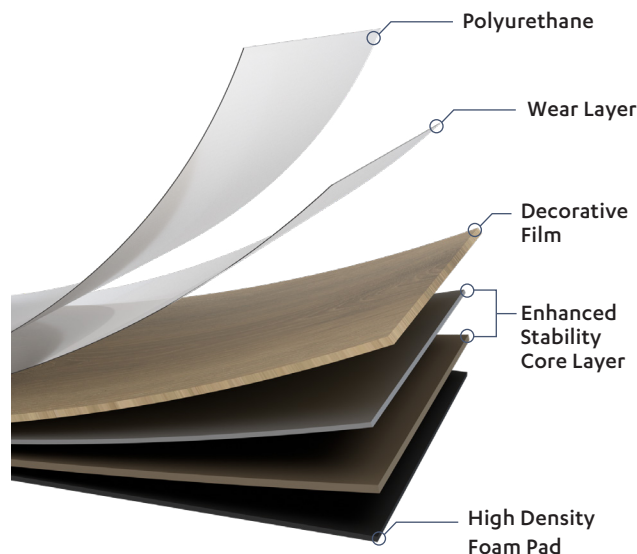

Warranty & Maintenance

5 Year Light Commercial/Multifamily Common Areas, 25 Year Residential/Multifamily Residence

Layout Options:

