

SILENT STRIDE



SPC | 8.5 MM, 20 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long, 225 mm x 1,422 mm
Overall Thickness	8.5 mm (Includes 1.0 mm Pad)
Attached Pad	1.0 mm IXPE
Wear Layer	20 Mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	14.53 sf/ctn, 4 pcs/ctn, 41 lbs/ctn, 56 ctn/plt, 813.68 sf/plt

Installation & Maintenance

Angle / Angle

Layout Room Size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services
Phthalate Free

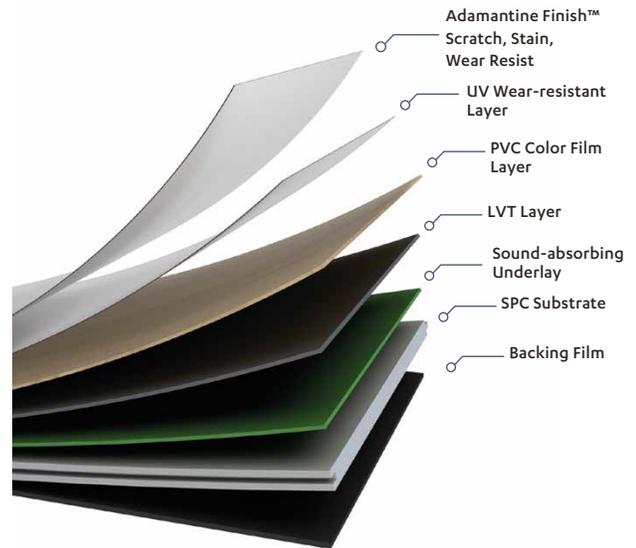

Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNose](#) Stair Nosing

Layout Options

