


Silentflor PUR - Expertly combining aesthetics with performance, the Silentflor PUR range's robust formulation, polyurethane reinforcement (PUR) and impact sound reduction level of 19dB, meets the demands of today's commercial interiors while offering a suite of modern colors and designs.

Silentflor PUR consists of 36 beautifully designed shades that offer the perfect floor covering solution for heavy commercial installations in the healthcare, office, residential, retail and leisure sectors.



Acoustix Forest FX PUR - The natural environment is the primary inspiration for Acoustix Forest FX PUR. With a varied tonal palette, this vinyl sheet format has excellent durability and is highly suited to high traffic commercial interiors.

The performance characteristics are appealing to all sectors where acoustic performance is crucial, and Acoustix Forest FX PUR produces an impact sound reduction level of 19dB.

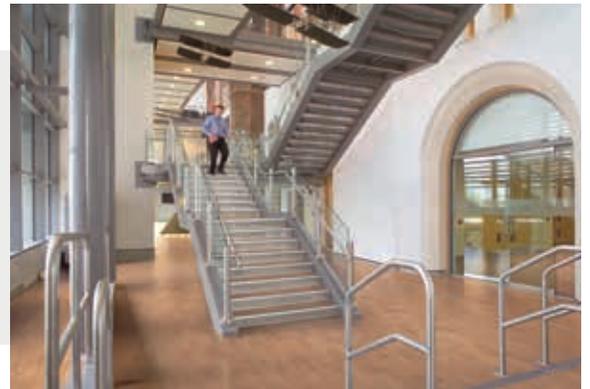

Polysafe Wood FX Acoustix PUR - Polysafe Wood FX Acoustix PUR is a high specification, decorative safety vinyl flooring range combining the assurance of sustainable slip resistance and acoustic sound insulation. Featuring authentic reproductions of popular and high clarity wood designs, the range incorporates a light to dark color spectrum with non-intrusive safety aggregates in the vinyl to create a safe yet attractive interior in commercial areas. With an integrated foam backed layer, impact sound reduction levels of 19dB are achieved. Polysafe Wood FX Acoustix PUR features the groundbreaking Polysafe PUR reinforcement for optimum appearance retention & superior cleaning benefits.






ACOUSTICS

Technical Details

- ASTM 1303 Standard Specification for Sheet Vinyl Floor Covering with Backing
- ASTM F970 Static Load Limit - 750 PSI
- ASTM D2047 Static Coefficient of Friction - >0.8
- ASTM F137 Flexibility -Passes
- ASTM F925 Excellent - Chemical Resistance Chart available upon request
- ASTM F1514 Resistance to Heat - $\Delta E \leq 8$
- ASTM F1515 Resistance to Light - $\Delta E \leq 8$
- ASTM E648 Flammability (Critical Radian Flux NFPA Class 1 (>0.45 watts/cm2)
- ASTM E662 Smoke Density <450
- Commercial Warranty - **10 years**
- Acoustic Impact Sound Reduction ≥ 19 dB

Product Options

- Rolls only
- 3.7mm thickness
- 6' 7" wide by 65.71 LF
- 47.84 square yards per roll

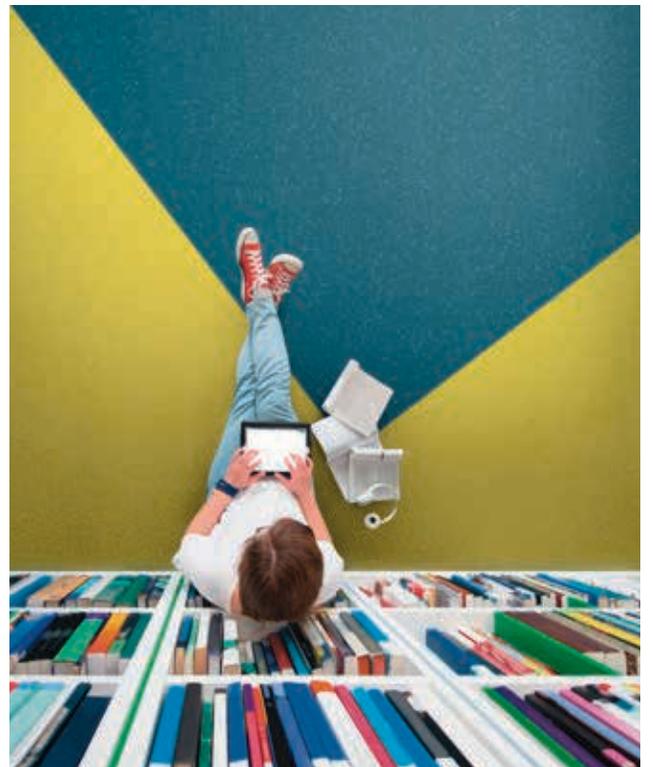

sales@PFAmerica.us
Call: 888-530-4925

© 2019 PF America, All Rights Reserved.
Lancaster, PA 17601