



DONNINGTON

LOOSE LAY | 4.5 MM, 20 MIL

TAS

CONTRACT

TASCONTRACT.COM

DONNINGTON

LOOSE LAY | 4.5 MM, 20 MIL




100% **VIRGIN MATERIAL**

Crafted from 100% virgin materials



FIBERGLASS STABILIZATION LAYER

Reinforced with a fiberglass stabilization layer, the Donnington Collection provides exceptional dimensional stability and added strength to the core. This ensures the flooring remains stable and resists expansion or contraction over time, even in commercial spaces.



WIDE AND LONG PLANKS

With impressive dimensions of 9.25" wide by 60.25" long, the Donnington Collection's planks create a modern, spacious look that enhances the visual appeal of any commercial interior. The larger plank size also reduces the number of seams, contributing to a more cohesive and polished appearance.



WATERPROOF PROTECTION

Designed to withstand spills and splashes, the Donnington Collection is 100% waterproof, providing peace of mind in areas prone to moisture. This feature ensures the flooring maintains its integrity and appearance, even in challenging environments.



MODERN HICKORY
LUXURY VINYL

NE450500
4.5 MM | 20 MIL



VANILLA HICKORY
LUXURY VINYL

NE450503
4.5 MM | 20 MIL



HERITAGE HICKORY
LUXURY VINYL

NE450702
4.5 MM | 20 MIL



CAPPUCINO OAK
LUXURY VINYL

NE450703
4.5 MM | 20 MIL



IMPERIAL KHAKI
LUXURY VINYL

NE450704
4.5 MM | 20 MIL



MODERN TAUPE
LUXURY VINYL

NE450706
4.5 MM | 20 MIL

DONNINGTON

LOOSE LAY | 4.5 MM, 20 MIL

Construction	Luxury Vinyl Tile
Dimensions	9.25" Wide x 60.25" Long 234.95 mm x 1530.35 mm
Overall Thickness	4.5 mm
Wear Layer	20 mil
Finish	Polyurethane
Texture	Embossed
Edge Profile	4-Sided micro bevel

Installation & Maintenance

DropFit Loose Lay with perimeter adhesive or Full Spread Adhesive

Transition: Transition required for rooms larger than 45' W x 45' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Tas Flooring

Test Method & Requirements

Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Pass
Coefficient of Friction	ASTM 2047	Pass >0.6
Sound Transmission Class (STC)	ASTM E90	63
Impact Insulation Class (IIC)	ASTM E492	70
High Frequency Impact Insulation Class(HIIC)	ASTM E3222	90


**The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.*

Health & Environment

Floorscore SCS Certified

Phthalate-Free


100% Virgin Material

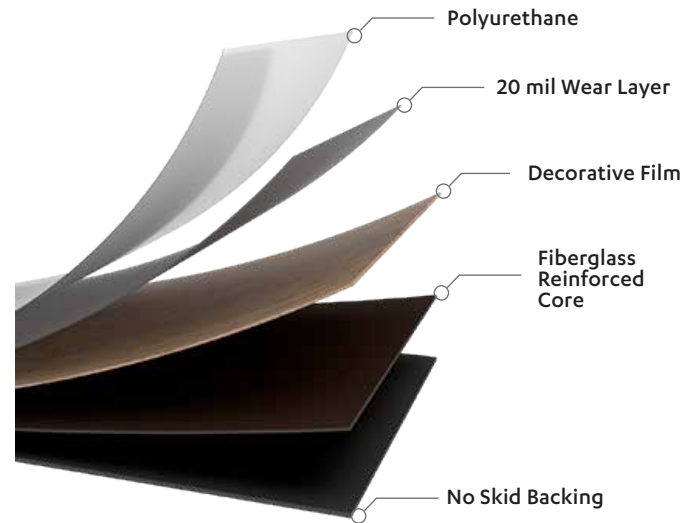


Warranty

20-Year Commercial Wear, Lifetime Waterproof,
Lifetime Residential Wear

Layout Options:

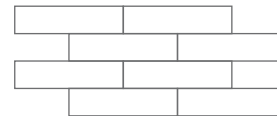

ASHLAR

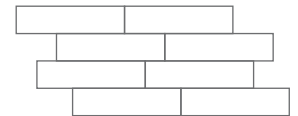

STAGGER



T A S

CONTRACT

TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.