

ARTESIAN WOODS



GLUE DOWN | 3.0 MM, 20 MIL

Construction	Luxury Vinyl Tile
Classification	ASTMF 1700, Class III, Type B
Dimensions	7" long x 60" wide, 177.8 mm x 1524 mm
Overall Thickness	3.0 mm
Wear Layer	20 mil
Finish	Adamantine Finish™
Texture	Embossed
Edge Profile	Micro Bevel
Packaging	43.75 sf/ctn, 15 pcs/ctn, 55.3 lbs/ctn, 50 ctn/plt, 2187.5 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit


Maintenance: Neutral pH Cleaner

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environment


FloorScore® program by SCS Global Services

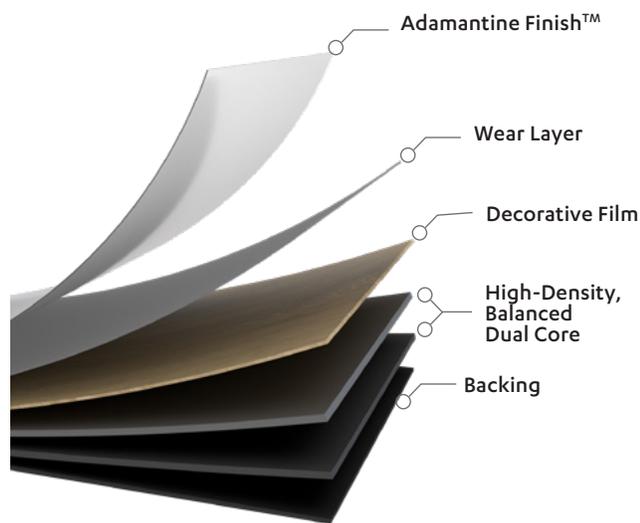


Warranty

10 Year Commercial, 10 Year Multifamily Common Areas
30 Year Residential, 30 Year Multifamily Residence Areas


Layout Options:




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER