

## ABA SPC | 5.5 MM, 12 MIL

Construction	ABA Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	7.25" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	5.5 mm (includes 1.5 mm pad)
Attached Pad	1.5 mm Acoustical Pad
Wear Layer	12 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	26.43 sf/ctn, 11 pcs/ctn, 45.7 lbs/ctn, 60 ctn/plt, 1585.8 sf/plt

### Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required for rooms larger than 50' W x 50' L.


Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring.

### Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass>250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	61
Sound Transmission Class STC	ASTM E90*	53

\*Acoustical ratings shown are based on the most representative assembly. IIC, STC, HIIC, and Low IIC results are dependent upon the specific floor/ceiling assembly. Please contact your representative for detailed test reports or assembly information.

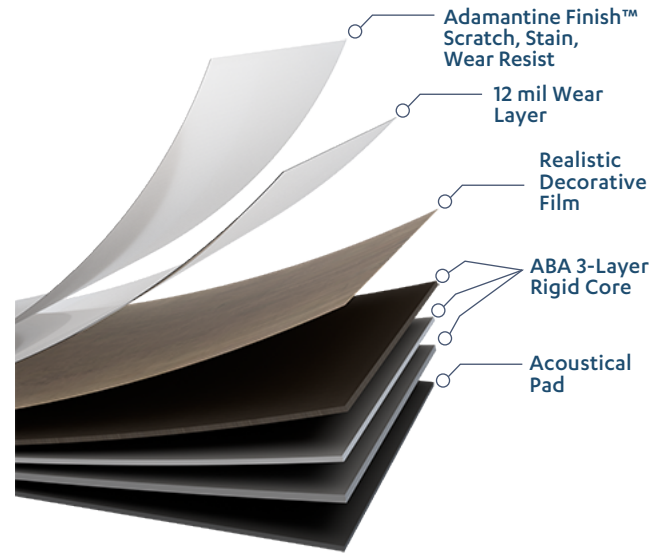


### Warranty

5 Year Light Commercial, 5 Year MultiFamily, 25 Year Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round  
[QNoise](#) Stair Nosing

### Layout Options:

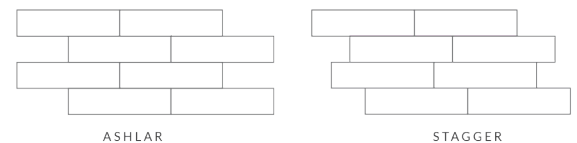

### Health & Environmental

FloorScore® program by SCS Global Services

Hydrophobic Antimicrobial Surfaces ASTM E2180-18 Reduction % >99.9  
Phthalate-Free

