

## GLUE DOWN | 2.0 MM, 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700
Dimensions (nominal)	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	51.33 sf/ctn, 22 pcs/ctn, 36 lbs/ctn, 50 ctn/plt, 2566.5 sf/plt

### Installation & Maintenance

#### Glue Down

Ambient & Surface Temperature at Installation: Acclimate product to environment.


Maintenance: Subfloors dry and flat (3/16" in 10'). Approved over in-floor Radiant Heat, all methods. Max temp. 85 degrees.

Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set  
- Pinnacle, Premium Transitional Pressure Sensitive, hard set

### Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Slip Resistance	DIN 51130	Angle: 18.7° Rating: R10

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

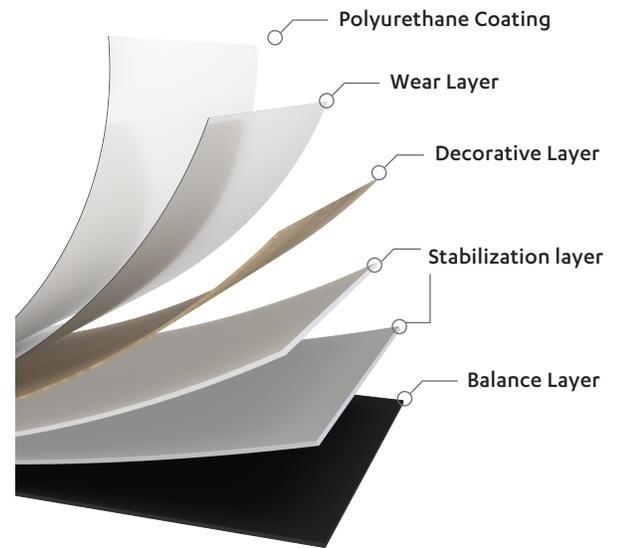


### Warranty

5 Year Light Commercial/Multifamily Common Areas, 25 Year Residential/Multifamily Residence

### Layout Options:


NOT TO SCALE

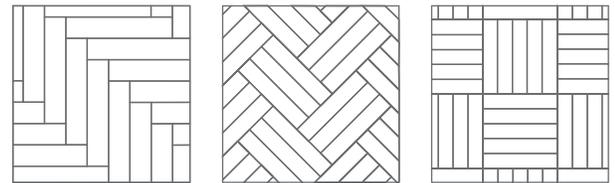


HERRINGBONE

TRIPLE HERRINGBONE

FIVE PLANK PARQUET



ASHLAR



STAGGER

### Health & Environmental

FloorScore® program by SCS Global Services  
Phthalate-Free  
Environmental Product Declaration (EPD)

