



BUILDER'S SELECT
SPC | 5.0 MM, 20 MIL

TAS
CONTRACT
TASCONTRACT.COM

BUILDER'S SELECT

SPC | 5.0 MM, 20 MIL



ENGINEERED FOR **HOME BUILDER DEMANDS**

With a 20 mil wear layer and polyurethane finish, this collection delivers the durability and scratch resistance needed for high-traffic residential builds and light commercial use—ideal for today's fast-paced construction timelines.



AUTHENTIC CHARACTER, MODERN APPEAL

9" x 60" planks feature embossed textures and painted bevels that showcase natural woodgrain—bringing warmth and realism to new construction interiors.



COMFORT THAT PERFORMS

An attached 1.0 mm IXPE pad enhances underfoot comfort and sound absorption—streamlining installation while elevating the homeowner experience.



TAILORED FOR **TURNKEY EFFICIENCY**

A rigid polymeric core and angle/angle floating method ensure a secure, efficient install—perfect for builder schedules and multi-home rollouts.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Quarter Round
- Star Noise
- QNose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





CARUSO
SPC RIGID CORE

DGRC1101
5.0 MM | 20 MIL



BOCELLI
SPC RIGID CORE

DGRC1102
5.0 MM | 20 MIL



FLEMING
SPC RIGID CORE

DGRC1103
5.0 MM | 20 MIL



SENECA
SPC RIGID CORE

DGRC1104
5.0 MM | 20 MIL



BIANCO
SPC RIGID CORE

DGRC1105
5.0 MM | 20 MIL

BUILDER'S SELECT



SPC | 5 MM, 20 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long (228 mm x 1500 mm)
Overall Thickness	5 mm (Includes 1 mm Pad)
Attached Pad	1 mm IXPE Pad
Wear Layer	20 Mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	22.09 sf/ctn, 6 pcs/ctn, 37.7 lbs/ctn, 52 ctn/plt, 1148.7 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface: Acclimate product to environment. Work out of multiple boxes
Subfloors dry and flat (3/16" in 10'),
Radiant Heat approved: Yes
Water based system only. Max temp 85 degrees

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Phthalate Free

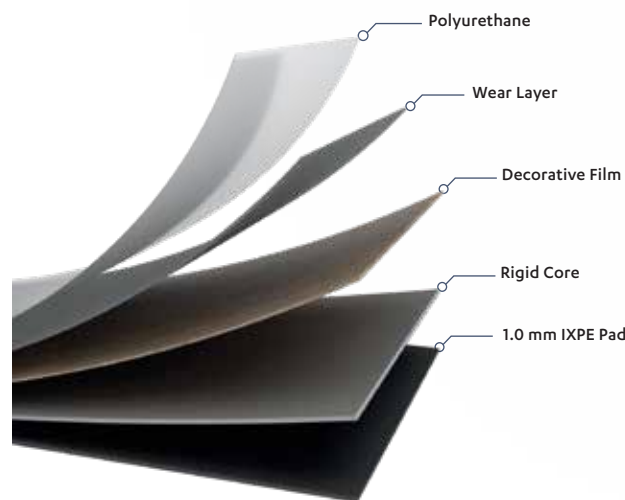


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential


Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNoise](#) Stair Nosing

Layout Options



ASHLAR



STAGGER



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.