
# CONCORD

TAS FLOORING

## GLUE DOWN | 2.5 MM, 20 MIL

| | |
|---|---|
| Construction | Solid Luxury Vinyl |
| Classification | ASTM F1700, Class III, Type B |
| Dimensions | 7" Wide x 48" Long, 177.8 mm x 1219.2 mm |
| Overall Thickness | 2.5 mm |
| Attached Pad | N/A |
| Wear Layer | 20 mil |
| Finish Coat | Polyurethane Glass Bead |
| Texture | Embossed |
| Edge Profile | 4-Sided Square Edge |
| Packaging | 42.03 sf/ctn, 50 ctn/plt, 2101.5 sf/plt |

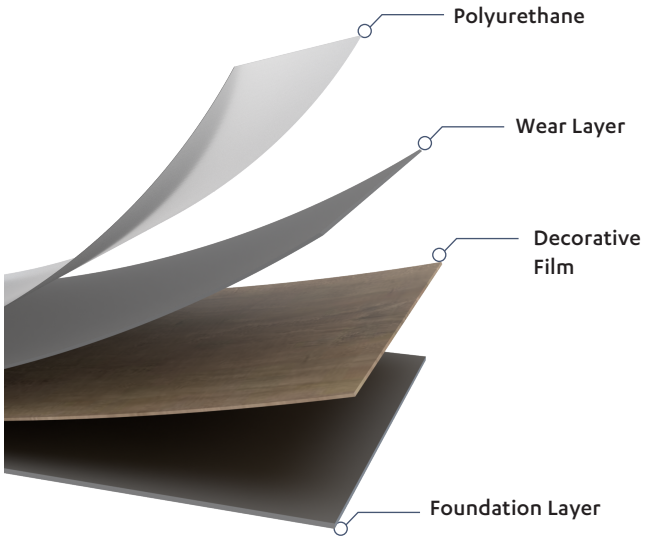


### Installation & Maintenance

| |
|---|
| Glue Down |
| Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit |
| Maintenance: A neutral pH cleaner, such as TAS Flooring Fresh Floors |
| Recommended Adhesive: WF Taylor Dynamic, Uzin KE39.<br>For Heavy Loads use WF Taylor Pinnacle |

### Warranty


10 Year Light Commercial/Multifamily Common Areas, 30 Year Residential

### Test Method & Requirements

| | | |
|---|---|---|
| Solid Vinyl Floor Tile | ASTM F1700 | Pass |
| Flexibility | ASTM F137 | Pass |
| Thickness | ASTM F386 | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability | ASTM F2199 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | Pass > 250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |
| Slip Resistance | DIN 51130 | Angle: 18.7°<br>Rating: R10 |

### Layout Options: NOT TO SCALE

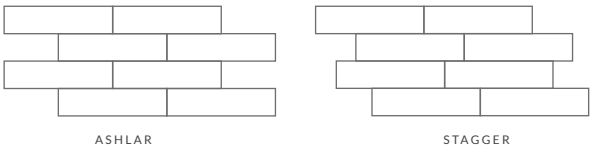


### Health & Environmental

FloorScore SCS Certified
Phthalate-Free

floor score SCScertified · PHTHALATE FREE · Hydronic Heat · Waterproof · Glue

TAS CONTRACT

Additional specifications, full installation instructions & warranty information available online at **TASCONTRACT.COM**

*A division of* T&A supply company, Inc.