



EPIC SERIES

SPC | 5.5 MM, 20 MIL

TAS
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

EPIC SERIES

SPC | 5.5 MM, 20 MIL



REALISTIC WOOD AESTHETICS

Excimer Ultra Matte technology eliminates sheen variation, enhancing grain detail and natural color variation for the most realistic wood visuals.



ENHANCED TEXTURE

The Embossed-in-Register process creates a tactile experience of natural wood and painted bevel edges amplify a refined finish.



DURABLE PERFORMANCE

Engineered with a rigid SPC core and attached IXPE pad, the Epic Series provides dimensional stability and long-term durability suited for multifamily and light commercial environments.



EASY TO MAINTAIN

Crafted with virgin PVC and free of ortho-phthalates, this waterproof flooring delivers dependable performance and low-maintenance care.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Quarter Round
- Star Noise
- QNose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





ZENA
LUXURY VINYL

NFRC0601
5.5 MM | 20 MIL



ENVY
LUXURY VINYL

NFRC0602
5.5 MM | 20 MIL



VIBE
LUXURY VINYL

NFRC0603
5.5 MM | 20 MIL



CHIC
LUXURY VINYL

NFRC0604
5.5 MM | 20 MIL



ATOM
LUXURY VINYL

NFRC0605
5.5 MM | 20 MIL



GLOW
LUXURY VINYL

NFRC0606
5.5 MM | 20 MIL



BOLD
LUXURY VINYL

NFRC0607
5.5 MM | 20 MIL

WATERPROOF RIGID CORE

EPIC SERIES



SPC | 5.5 MM, 20 MIL

Construction	SPC Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	7" Wide x 60" Long (182 mm x 1524 mm)
Overall Thickness	5.5 mm (Includes 1.0 mm IXPE Pad)
Wear Layer	20 mil
Finish	Polyurethane
Texture	Embossed-In-Register
Edge Profile	Painted Bevel
Packaging	23.88 sf/ctn, 8 pcs/ctn, 46.5 lbs/ctn, 55 ctn/plt, 1313.4 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms larger than: (50') L x (50')
Minimum expansion space to all vertical substrates 1/4"


Ambient & Surface:

- Acclimate product to environment
- Mix planks from multiple boxes during installation
- Subfloor must be dry and level (max 3/16" variation over 10')
- Compatible with radiant heat systems (water-based only)
- Maximum radiant heat temperature: 85°F (29°C)

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

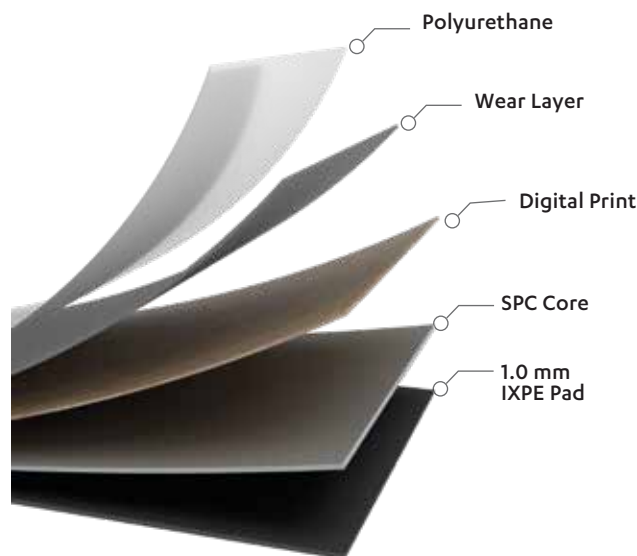


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-mold, [Q Nose](#)

Layout Options:

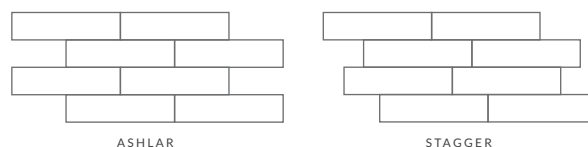

Health & Environment

FloorScore® program by SCS Global Services



Additional specifications, full installation instructions & warranty information available online at PACMAT.COM

TAS
CONTRACT
TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.