



# VISTA TILE

SPC | 5 MM, 12 MIL

**T A S**

CONTRACT

[TASCONTRACT.COM](http://TASCONTRACT.COM)

# VISTA TILE

SPC | 5 MM, 12 MIL



## SUPERIOR MOISTURE PROTECTION

Ideal for multifamily environments, Lunar resists water damage and maintains dimensional stability—thanks to its durable SPC waterproof core and 8.0 mm total thickness.



## LONG-LASTING BEAUTY AND DURABILITY

Enhanced scratch resistance and wear performance come from a robust 20 mil wear layer and a polyurethane Gra-matte finish that preserves aesthetic appeal over time.



## ELEVATED CONTEMPORARY STYLE

Sleek, upscale visuals that align with modern design standards are achieved through 9" x 60" embossed planks with painted bevel edges.



## QUIETER, MORE COMFORTABLE LIVING

Improved sound absorption and underfoot comfort—perfect for reducing noise transfer between units—are delivered by an attached 2.0 mm IXPE pad.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**RATTLESNAKE RIDGE**  
LUXURY VINYL

NFRC0304  
8 MM | 20 MIL



**OCEAN VIEW**  
LUXURY VINYL

NFRC0303  
5 MM | 12 MIL



**LOOKOUT POINT**  
LUXURY VINYL

NFRC0301  
5 MM | 12 MIL



**SCENIC BYWAY**  
LUXURY VINYL


NFRC0302  
5 MM | 12 MIL

# VISTA TILE



## SPC | 5.0 MM, 12 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 2, Class B
Dimensions	12" Wide x 24" Long, 305 mm X 610 mm
Overall Thickness	5.0 mm (Includes 1.0 mm Pad)
Attached Pad	1.0 mm IXPE Acoustical Pad
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	24.03 sf/ctn, 12 pcs/ctn, 42 lbs/ctn, 54 ctn/plt, 1298 sf/plt

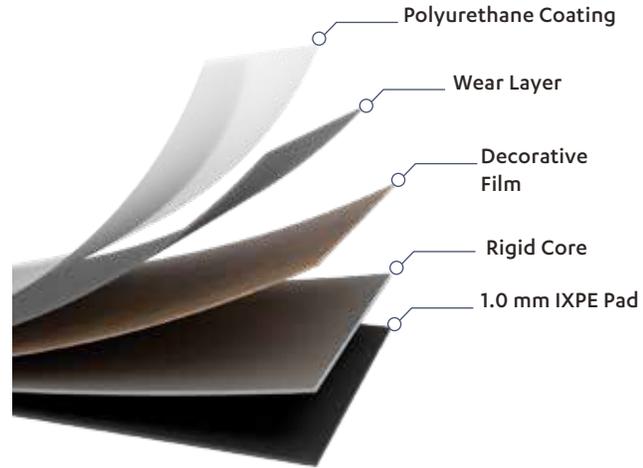

### Installation & Maintenance

Angle / Angle

Layout Room size: Minimum expansion space to all vertical substrates 1/4"  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring

### Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Warranty


5 Year Light Commercial, 5 Year Multifamily, 25 Year Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

### Layout Options:

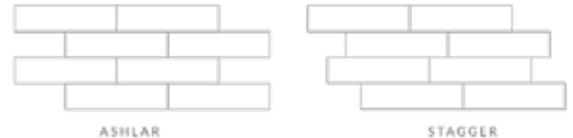

### Health & Environmental

FloorScore SCS Certified

Phthalate Free



T A S

CONTRACT

TASCONTRACT.COM



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.