



TANDEM CRESCENDO

WPC | 8.0 MM, 20 MIL

TAS
CONTRACT
TASCONTRACT.COM

TANDEM CRESCENDO

WPC | 8.0 MM, 20 MIL



WPC RIGID CORE STABILITY

Crafted with a durable Wood Plastic Composite core and virgin PVC, Tandem Crescendo delivers reliable dimensional stability and long-lasting performance for multifamily applications.



ULTRA-MATTE ADAMANTINE

Finish™ features an ultra-matte surface with Adamantine Finish™ technology, providing superior scratch, stain, and wear resistance in high-use environments.



HEALTH-CONSCIOUS

Construction Made ortho-phthalate free and low-VOC, supporting healthier indoor environments without compromising durability or visual appeal.



COMFORT & ACOUSTIC SUPPORT

An 8.0 mm thickness with an attached 1.5 mm IXPE pad enhances sound absorption and underfoot comfort, while the 20 mil wear layer ensures long-term performance.

TRIMS & TRANSITIONS

- T-Mold
- Quarter Round
- Reducer
- Star Noise
- Endcap
- QNose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





TOSCANINI
LUXURY VINYL

DGWP0501
8.0 MM | 20 MIL



FIGARO
LUXURY VINYL

DGWP0502
8.0 MM | 20 MIL



CARMAN
LUXURY VINYL

DGWP0503
8.0 MM | 20 MIL



LUCIA
LUXURY VINYL

DGWP0504
8.0 MM | 20 MIL



FALSTAFF
LUXURY VINYL

DGWP0505
8.0 MM | 20 MIL



AIDA
LUXURY VINYL

DGWP0506
8.0 MM | 20 MIL



RIGOLETTO
LUXURY VINYL

DGWP0507
8.0 MM | 20 MIL

TANDEM CRESCENDO



WPC | 8.0 MM, 20 MIL

Construction	WPC Vinyl Click, Wood Plastic Composite
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	5" Wide x 60" Long (125 mm x 1500 mm)
Overall Thickness	8.0 mm (Includes 1.5 mm IXPE Pad)
Attached Pad	1.5 mm
Wear Layer	20 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed-In-Register
Edge Profile	Painted Bevel
Packaging	14.13 sf/ctn, 7 pcs/ctn, 21.1 lbs/ctn, 98 ctn/plt, 1384.7 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition Required for rooms Larger than: (50) L x (50) W

Ambient & Surface: Acclimate product to environment.
Work out of multiple boxes. Subfloors dry and flat (3/16" in 10')
Hydroponic Radiant Heat Systems only

Maintenance: No Polish, Fresh Floors by TAS Flooring


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Phthalate Free

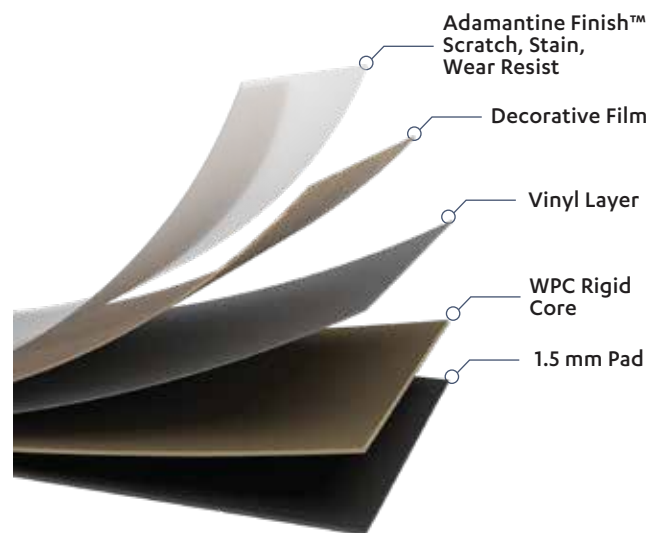


Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[Q Nose](#) Stair Nosing

Layout Options:

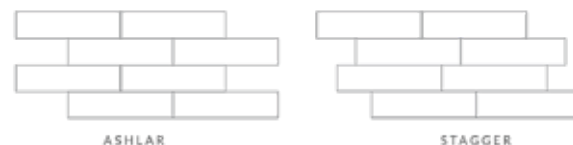

TAS
CONTRACT
TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.