



# SAVVY LIVING

SPC | 6.0 MM, 22 MIL

TAS

CONTRACT

[TASCONTRACT.COM](https://TASCONTRACT.COM)

# SAVVY LIVING

SPC | 6.0 MM, 22 MIL



## ADAMANTINE FINISH™

Engineered with a 22 mil wear layer and anti-scratch surface, providing superior durability for high-traffic environments.



## REALISTIC WOOD TEXTURE

Features Embossed-in-Register (EIR) technology, delivering an authentic wood grain look with seamless texture transitions.



## PRESSED BEVEL FOR ENHANCED VISUALS

Designed with a pressed bevel edge, creating a refined and natural appearance for elevated design aesthetics.



## RELIABLE & EFFICIENT INSTALLATION

With a 5 mm core thickness, the Savvy Living Collection minimizes installation challenges, ensuring stability and performance.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**ALLAN**  
LUXURY VINYL

DGRC1001  
6.0 MM | 22 MIL



**ROSLYN**  
LUXURY VINYL

DGRC1002  
6.0 MM | 22 MIL



**SAMATHA**  
LUXURY VINYL

DGRC1003  
6.0 MM | 22 MIL



**RONALD**  
LUXURY VINYL

DGRC1004  
6.0 MM | 22 MIL



**KERNING**  
LUXURY VINYL

DGRC1005  
6.0 MM | 22 MIL



**PATRICE**  
LUXURY VINYL

DGRC1006  
6.0 MM | 22 MIL



**BARNEY\***  
LUXURY VINYL

DGRC1007  
6.0 MM | 22 MIL



**CAYUSE\***  
LUXURY VINYL

DGRC1008  
6.0 MM | 22 MIL



**BROOKLINE\***  
LUXURY VINYL

DGRC1009  
6.0 MM | 22 MIL



**WADDEL\***  
LUXURY VINYL

DGRC1010  
6.0 MM | 22 MIL



**CAROLL\***  
LUXURY VINYL

DGRC1011  
6.0 MM | 22 MIL



**CROCKETT\***  
LUXURY VINYL

DGRC1012  
6.0 MM | 22 MIL

## SPC | 6.0 MM, 22 MIL

|                   |                                                                                                                                                               |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction      | SPC Rigid Core, Stone Polymer Composite                                                                                                                       |
| Classification    | ASTM F3261                                                                                                                                                    |
| Dimensions        | 7" Wide x 60" Long, 180 mm x 1524 mm<br>7" Wide x 56" Long, 180 mm x 1420 mm*                                                                                 |
| Overall Thickness | 6.0 mm (Includes 1.0 mm IXPE Pad)                                                                                                                             |
| Attached Pad      | 1.0 mm IXPE Pad                                                                                                                                               |
| Wear Layer        | 22 mil                                                                                                                                                        |
| Finish Coat       | Adamantine Finish™ Scratch, Stain, Wear Resist                                                                                                                |
| Texture           | Embossed-In-Register                                                                                                                                          |
| Edge Profile      | Pressed Bevel                                                                                                                                                 |
| Packaging         | 60" Planks - 23.62 sf/ctn, 8 pcs/ctn, 50 lbs/ctn, 45 ctn/plt, 1069.2 sf/plt<br>56" Plank - 24.76 sf/ctn, 10 pcs/ctn, 51.5 lbs/ctn, 45 ctn/plt, 1114.2 sf/plt* |

### Installation & Maintenance

Angle / Angle

Layout Room size: Minimum expansion space to all vertical substrates 1/4".  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


### Test Method & Requirements

|                                                 |               |                            |
|-------------------------------------------------|---------------|----------------------------|
| Resilient Floor in Modular Format               | ASTM F3261    | Pass                       |
| Thickness (with Pad)                            | ASTM F386/387 | Pass                       |
| Wear Layer Thickness                            | ASTM F410     | Pass                       |
| Stain/Chemical Resistance                       | ASTM F925     | Pass                       |
| Resistance to Heat Color Change                 | ASTM F1514    | Pass                       |
| Resistance to Light Color Change                | ASTM F1515    | Pass                       |
| Residual Indentation                            | ASTM F1914    | Pass                       |
| Size & Squareness                               | ASTM F2055    | Pass                       |
| Dimensional Stability                           | ASTM F2199    | Pass                       |
| Dimensional Stability w/Exposure to Heat        | ISO 23999     | Pass                       |
| Determination of Geometrical Characteristics    | ISO 24337     | Pass                       |
| Static Coefficient of Friction Polished Surface | ASTM D2047    | Exceeds                    |
| Static Load Limit                               | ASTM F970     | 0.005 in or less 2,000 psi |
| Flammability/Radiant Flux                       | ASTM E648     | Class I                    |
| Smoke Density                                   | ASTM E662     | Pass                       |
| Impact Insulation Class IIC                     | ASTM E492**   |                            |
| Sound Transmission Class STC                    | ASTM E90**    |                            |

\*\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore® program by SCS Global Services

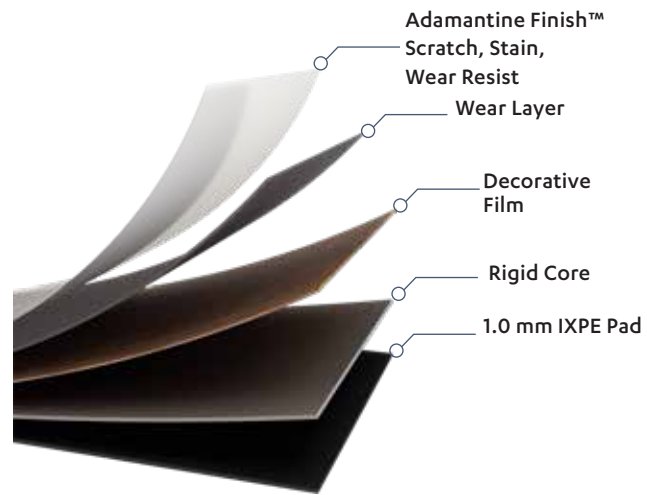


### Warranty

10 Year Light Commercial, 10 Year Multifamily,  
30 Year Residential


### Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-Mold, [QNose](#)

### Layout Options:

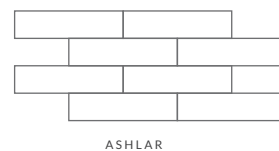

ASHLAR

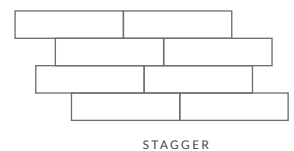

STAGGER

TAS

CONTRACT

TASCONTRACT.COM

PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.