

SILENT STRIDE



SPC | 8.5 MM, 20 MIL



Reserve | DGRC0901



Canard | DGRC0902



Belie | DGRC0903



Murmur | DGRC0904




Quell | DGRC0905



Placid | DGRC0906



Content | DGRC0907

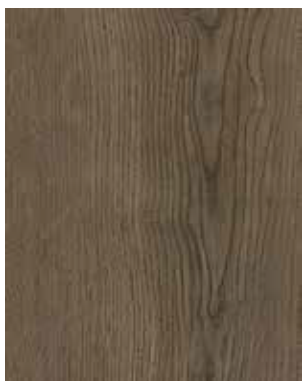

Subtle | DGRC0908



Whisper | DGRC0909

SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long, 225 mm x 1,422 mm
Overall Thickness	8.5 mm (includes 1.0 mm pad)
Wear Layer	20 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	14.53 sf/ctn, 4 pcs/ctn, 41 lbs/ctn, 56 ctn/plt, 813.68 sf/plt
Installation	Angle/Angle
Warranty	10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

INSTALLATION FAST FACTS

- No Transitions in under 2,500 sf
- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance

Read Complete Instructions Before Installing



tascontract.com

SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE

