



NOBILITY

GLUE DOWN | 2.5 MM, 12 MIL

TAS

CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

NOBILITY

GLUE DOWN | 2.5 MM, 12 MIL



NATURAL COLOR PALETTE

With beautifully embossed Pacific Northwest hardwood visuals, the Nobility Collection provides a cost-effective flooring solution without sacrificing style.



SCRATCH RESISTANCE

The Nobility Collection features a 12 mil low matte gloss polyurethane wear layer to protect against scratches and wear with minimal maintenance.



LIGHT COMMERCIAL

Designed to perform in multifamily and other light commercial areas, making it an ideal choice for spaces with moderate foot traffic.

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





ATTICUS
LUXURY VINYL

NOLV0701
2.5 MM | 12 MIL



BENTLEY
LUXURY VINYL

NOLV0702
2.5 MM | 12 MIL



DALTON
LUXURY VINYL

NOLV0703
2.5 MM | 12 MIL



GILES
LUXURY VINYL

NOLV0704
2.5 MM | 12 MIL



KINGSLEY
LUXURY VINYL

NOLV0705
2.5 MM | 12 MIL



ROLAND
LUXURY VINYL

NOLV0706
2.5 MM | 12 MIL

GLUE DOWN | 2.5 MM, 12 MIL

Construction	Solid Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long (177.8 mm x 1219.2 mm)
Overall Thickness	2.5 mm
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Square
Packaging	35 sf/ctn, 15 pcs/ctn, 30.5 lbs/ctn, 60 ctn/plt, 2100 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors.


Recommended Adhesive: -Dynamic, Transitional Pressure Sensitive, firm set
-Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore® program by SCS Global Services
Environmental Product Declaration (EPD)

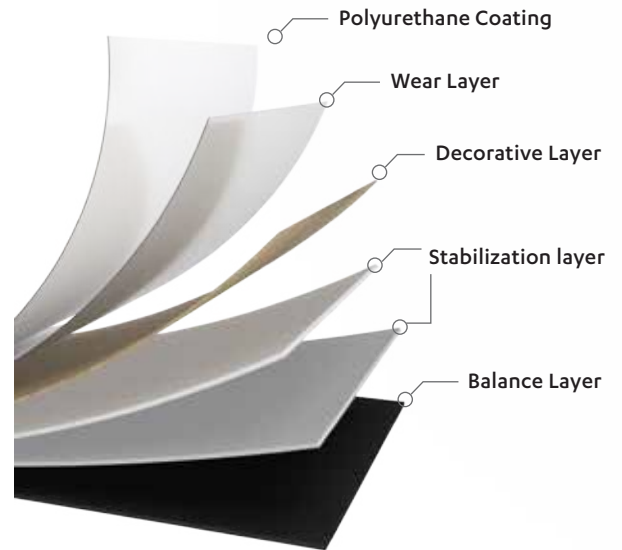

Warranty


5 Year Light Commercial, 5 Year Multifamily, 25 Year Residential

Accessories


[QNose](#) Stair Nosing

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER



TAS
CONTRACT
TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.