
EXPLORER

TAS FLOORING

GLUE DOWN | 5.0 MM, 20 MIL

Construction	Luxury Vinyl Plank
Classification	ASTMF 1700, Class III, Type B
Dimensions	7.25" Wide x 48" Length, 177.8 mm x 1219.2 mm
Overall Thickness	5.0 mm (includes Rubber Back)
Attached Pad	No Skid Acoustical Rubber Back
Wear Layer	20 mil High-Density Polyurethane
Finish Coat	Enhanced Ceramic Bead Coating
Texture	Embossed
Edge Profile	4-Sided Square Edges
Packaging	23.35 sf/carton, 50 carton/pallet, 1167.5 sf/pallet

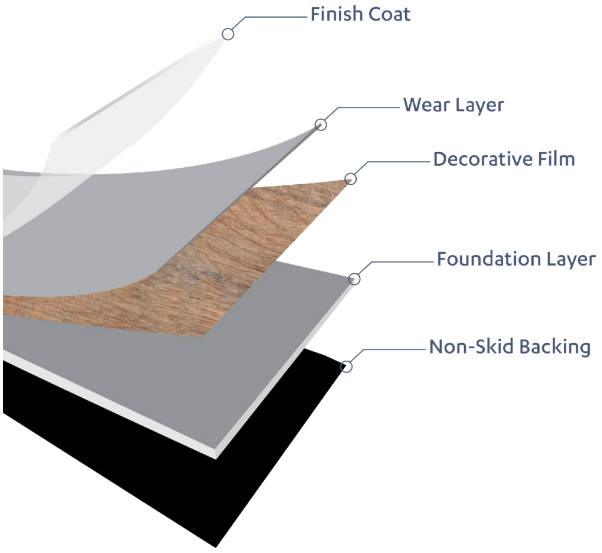

Installation & Maintenance

Glue Down, Loose Lay

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as Fresh Floors by TAS Flooring.

Recommended Adhesive: WF Taylor Dynamic, Uzin KE39.
For Heavy Loads use WF Taylor Pinnacle

Warranty

15 Year Light Commercial, 15 Year Multifamily, Lifetime Residential


Accessories


QNose Stair Nosing

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Layout Options:

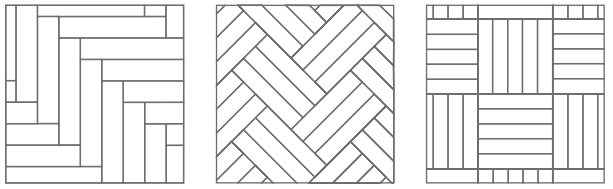

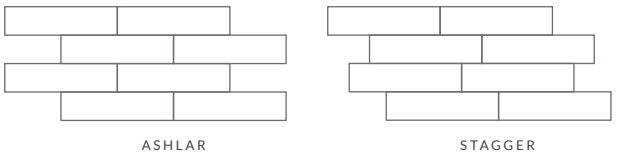

Health & Environmental

FloorScore Certified # SCS-FS-05749
Phthalate Free

floor score SCScertified

PHTHALATE FREE

Hydronic Heat

Waterproof

Glue

TAS CONTRACT