



HOME DESTINY

WATERPROOF LAMINATE

TAS
CONTRACT
TASCONTRACT.COM

HOME DESTINY

WATERPROOF LAMINATE | 12 MM + 2.0 MM PAD



DURABLE WEAR LAYER

Home Destiny features a melamine wear layer with an AC4 rating, built for heavy residential and light commercial use. The EIR texture adds realistic woodgrain detail, and it's CARB Phase 2 Compliant for healthier indoor air.



TRIPLE WATERPROOF PROTECTION

With a low-swell core, waxed edges, and watertight locking system, Home Destiny offers three layers of moisture defense for added durability.



PREMIUM CORE TECHNOLOGY

Engineered with a low-porosity, swell-resistant core, this flooring maintains dimensional stability and outperforms standard laminate options.



ENHANCED UNDERLAYMENT

The integrated underlayment improves sound absorption, boosts comfort underfoot, and simplifies installation in multifamily and light commercial spaces.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





STOWE
WATERPROOF LAMINATE

IVLA0101
12 MM + 2.0 MM



MADISON
WATERPROOF LAMINATE

IVLA0102
12 MM + 2.0 MM



CAROVA
WATERPROOF LAMINATE

IVLA0103
12 MM + 2.0 MM



CARLSBAD
WATERPROOF LAMINATE

IVLA0104
12 MM + 2.0 MM



SEDONA
WATERPROOF LAMINATE

IVLA0105
12 MM + 2.0 MM



HARTFORD
WATERPROOF LAMINATE

IVLA0106
12 MM + 2.0 MM



GATLINGBURG
WATERPROOF LAMINATE

IVLA0107
12 MM + 2.0 MM



FREMONT
WATERPROOF LAMINATE

IVLA0108
12 MM + 2.0 MM

HOME DESTINY



WATERPROOF LAMINATE | 12 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	9.25" Wide x 60" Long (238 mm x 1515 mm)
Overall Thickness	14 mm (Includes 2.0 mm Pad)
Attached Pad	2.0 mm
Wear Surface	AC4 Rating
Texture	Embossed In Register
Edge Profile	4-Sided Painted Bevel
Packaging	19.41 sf/ctn, 5 pcs/ctn, 44.4 lbs/ctn, 52 ctn/plt, 1009.3 sf/plt

Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Carb Phase II Compliant

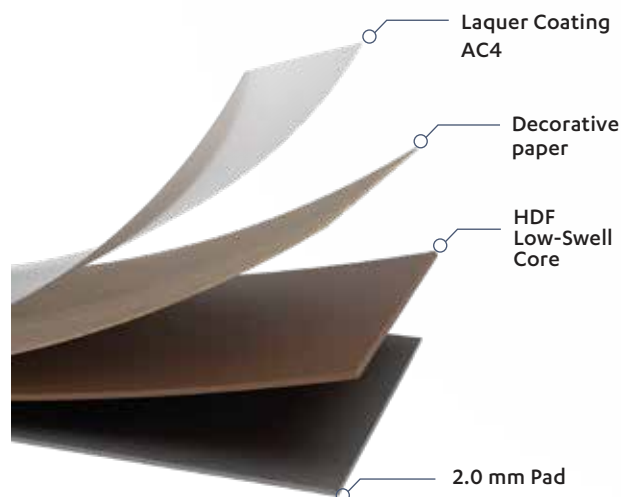

Warranty


Topical Waterproof, Lifetime Residential, 15 Year Light Commercial and Multifamily Common Areas

Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNose](#) Stair Nose

Layout Options:

NOT TO SCALE



ASHLAR



STAGGER



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.