



# LUNAR MULTI

SPC | 8 MM, 20 MIL

**TAS**  
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

# LUNAR MULTI

SPC | 8 MM, 20 MIL



## **SUPERIOR** MOISTURE PROTECTION

Ideal for multifamily environments, Lunar Multi resists water damage and maintains dimensional stability—thanks to its durable SPC waterproof core and 8.0 mm total thickness.



## **LONG-LASTING** BEAUTY AND DURABILITY

Enhanced scratch resistance and wear performance come from a robust 20 mil wear layer and a polyurethane Gra-matte finish that preserves aesthetic appeal over time.



## **ELEVATED** CONTEMPORARY STYLE

Sleek, upscale visuals that align with modern design standards are achieved through 5", 7" and 9" embossed planks with painted bevel edges.



## **QUIETER** , MORE **COMFORTABLE LIVING**

Improved sound absorption and underfoot comfort—perfect for reducing noise transfer between units—are delivered by an attached 2.0 mm IXPE pad.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**MOON ROCK**  
LUXURY VINYL

DGRC1201  
8 MM | 20 MIL





**CRESCENT**  
LUXURY VINYL

DGRC1202  
8 MM | 20 MIL



**HARVEST**  
LUXURY VINYL

DGRC1203  
8 MM | 20 MIL





**ORBIT**  
LUXURY VINYL

DGRC1204  
8 MM | 20 MIL

# LUNAR MULTI



SPC | 8.0 MM, 20 MIL

Construction	SPC Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	(Multi Width) 5", 7", 9" x 60"
Overall Thickness	8.0 mm (Included 2.0 mm IXPE Pad)
Wear Layer	20 mil
Finish	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	16.953 sf/ctn, 6 pcs/ctn, 43.4 lbs/ctn, 45 ctn/plt, 762.89 sf/plt

## Installation & Maintenance

Angle / Angle

Transition Required for rooms Larger than: (50) L x (50) W  
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner


## Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

## Health & Environment

FloorScore SCS certified

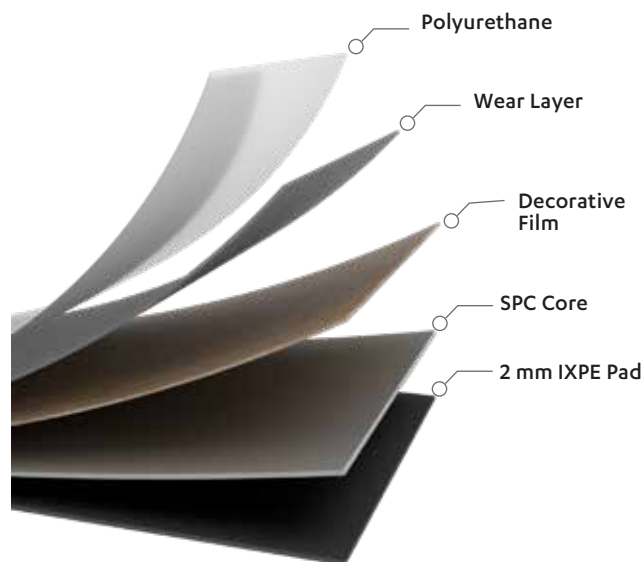


## Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential


## Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-mold, Q Nose

## Layout Options:



ASHLAR



STAGGER

TAS

CONTRACT

TASCONTRACT.COM

PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.