



EVERECO

PVC-FREE GLUE DOWN | 2.5 MM

TAS
CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

EVERECO

PVC-FREE GLUE DOWN | 2.5 MM



PVC-FREE

The EverEco Collection is a PVC-free, plasticizer free solution to ensure a healthy indoor environment. It's sustainably made with 100% recyclable thermoplastic polyurethane (PU).



BEAUTY AND DURABILITY

Discover the perfect blend of beauty and durability with our PVC-Free commercial resilient tile. Designed to withstand the demands of heavy-traffic areas, this flooring solution features stunning wood visuals that bring warmth and elegance to any space. Backed by a 10-year commercial warranty, our resilient tile ensures long-lasting performance without compromising on style.



SUPERIOR STABILITY AND COMFORT

Featuring EverEco Core technology with a fiberglass stabilization layer, this collection ensures superior dimensional stability and peel resistance. Its highly elastic composition allows for faster indentation recovery and better underfoot comfort, making it an ideal choice for demanding commercial environments.

Wood visuals available in a 2.0 mm, 12 mil construction through the Virtue Collection.

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





ADAIR PLANK
PVC-FREE GLUE DOWN

NOLUP250404
2.5 MM



BOLLEN PLANK
PVC-FREE GLUE DOWN

NOLUP250401
2.5 MM



ORIEL PLANK
PVC-FREE GLUE DOWN

NOLUP250406
2.5 MM



ROWAN PLANK
PVC-FREE GLUE DOWN

NOLUP250407
2.5 MM



SADDLE PLANK
PVC-FREE GLUE DOWN

NOLUP250403
2.5 MM



TATUM PLANK
PVC-FREE GLUE DOWN

NOLUP250405
2.5 MM



VERNON PLANK
PVC-FREE GLUE DOWN

NOLUP250402
2.5 MM



SINATRA STONE
PVC-FREE GLUE DOWN

NOLUT250421
2.5 MM

PVC-FREE GLUE DOWN | 2.5 MM

Construction	PVC-Free Resilient Planks & Tiles
Classification	ASTMF3404
Dimensions (nominal)	Wood: 7" Wide x 48" Long, 177.8 mm x 1219.2 mm Stone: 12" Wide x 24" Long, 308.8 mm x 609.6 mm
Overall Thickness	2.5 mm
Finish Coat	PVC-Free Polyurethane and Thermoplastic Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	Wood: 35 sf/ctn, 15 pcs/ctn, 30.5 lbs/ctn, 60 ctn/plt, 2100 sf/plt Stone: 36 sf/ctn, 18 pcs/ctn, 31.3 lbs/ctn, 60 ctn/plt, 2160 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: Acclimate product to environment.


Maintenance: Subfloors dry and flat (3/16" in 10'). Approved over in-floor Radiant Heat, all methods. Max temp. 85 degrees.

Recommended Adhesives: Taylor Adhesive Dynamic (preferred), Taylor Pinnacle, or TEC Flexera High Track Premium Universal Adhesive. Please see Installation Instructions for full application requirements.

Test Method & Requirements

Heterogeneous Polyurethane Flooring (PVC Free)	ASTM F3404	
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Static Load Recovery > 250 Lbs	ASTM F970	Pass
Resistance to Heat / Light	ASTM F1514-15	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Measuring of Resilient by Dial Gauge	ASTM F2421	Pass
Castor Chair Test	ISO 4918	Pass
Static COF Polished Surface	ASTM D2047	Exceeds Industry Standard
Flammability/Radiant Flux	ASTM E648	Class i
Smoke Density	ASTM E662	Pass

**The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.*

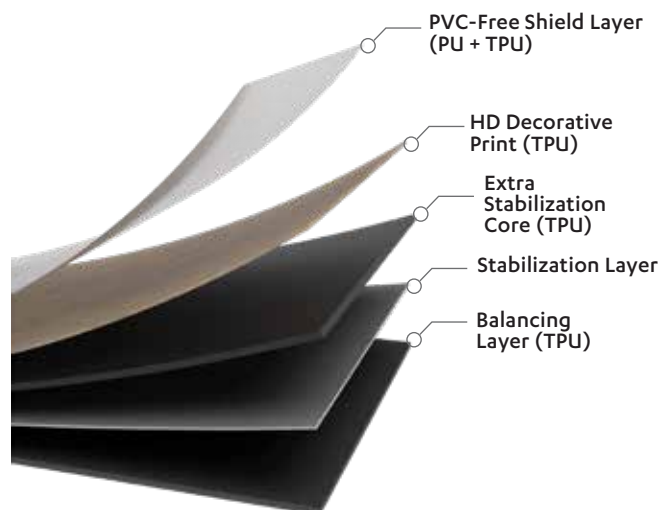


TPU = Thermoplastic Polyurethane

Warranty


10 Year Commercial, 10 Year Light Commercial, 25 Year Residential

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET

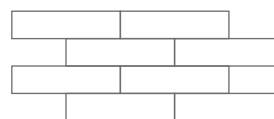

ASHLAR

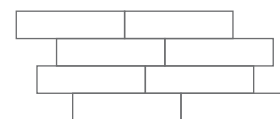

STAGGER

Health & Environmental

FloorScore SCS Certified
Phthalate-Free
PVC-Free
100% Recyclable
100% Thermoplastic PU
Declare Red List Free Verified
Health Product Declaration (HPD) Verified



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.