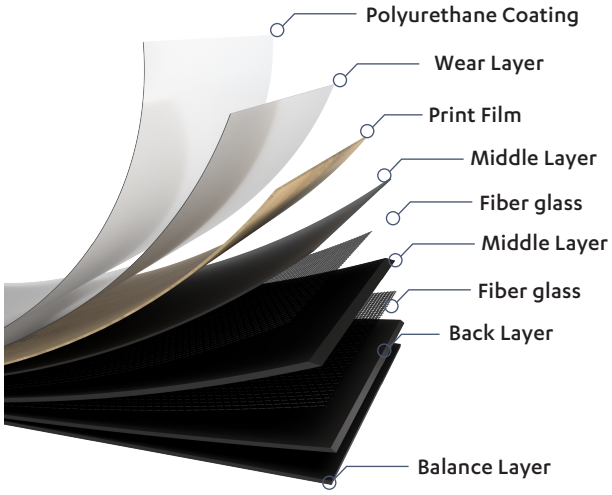
FRONTIER

TAS FLOORING

GLUE DOWN | 5.0 MM, 20 MIL

Construction	Flexible Luxury Vinyl Plank
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long (177.8 mm x 1219 mm)
Overall Thickness	5.0 mm
Wear Layer	20 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Micro Bevel
Packaging	23.33 sf/ctn, 10 pcs/ctn, 44.85 lbs/ctn, 50 ctn/plt, 1166.5 sf/plt



Installation & Maintenance

Glue Down, Loose-Lay

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors.

Recommended Adhesive: WF Taylor Dynamic, Uzin KE39.
For Heavy Loads use WF Taylor Pinnacle

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore SCS Certified
Phthalate-Free


Warranty


10 Year Light Commercial, 30 Year Multifamily Residence, Lifetime Residential


Accessories


QNose Stair Nosing


Layout Options: NOT TO SCALE


HERRINGBONE


TRIPLE HERRINGBONE


FIVE PLANK PARQUET


ASHLAR


STAGGER

floor score SCScertified

PHTHALATE FREE

Hydronic Heat

Double fiberglass

Glue

TAS CONTRACT