



OLYMPUS

EVC | 10 MM, 22 MIL

TAS

CONTRACT

TASCONTRACT.COM

OLYMPUS

EVC | 10 MM, 22 MIL



ADAMANTINE FINISH™

The Olympus Collection is engineered with advanced Adamantine Finish™ Protection, providing superior resistance against scratches, stains, and wear. Exceeding industry wear testing standards, this technology ensures unbeatable defense in high-traffic commercial environments. The result is a durable, resilient flooring solution that maintains its beauty and integrity for years to come.




VISUAL TEXTURE

Designed with an embossed-in-register surface, the Olympus Collection delivers realistic wood textures that enhance the natural look and feel of each plank. This attention to detail adds depth and authenticity to commercial interiors.



QUIET CORK BACKING

Featuring a 2.0 mm quiet cork backing, the Olympus Collection provides enhanced sound insulation, reducing noise transmission in busy commercial settings. This built-in acoustic layer creates a more comfortable and quiet environment.



STRENGTH AND STABILITY:

With a substantial 10 mm overall thickness and a waterproof core, the Olympus Collection provides exceptional stability and durability. This combination offers a solid foundation for commercial spaces that require both strength and style, ensuring lasting performance in environments where moisture resistance is essential.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





CACHE
LUXURY VINYL

DGWP0301
10 MM | 22 MIL



PENDLETON
LUXURY VINYL

DGWP0302
10 MM | 22 MIL



PRESTIGE
LUXURY VINYL

DGWP0303
10 MM | 22 MIL



ESSENCE
LUXURY VINYL

DGWP0304
10 MM | 22 MIL




MONACO
LUXURY VINYL

DGWP0305
10 MM | 22 MIL



MYSTIQUE
LUXURY VINYL

DGWP0306
10 MM | 22 MIL

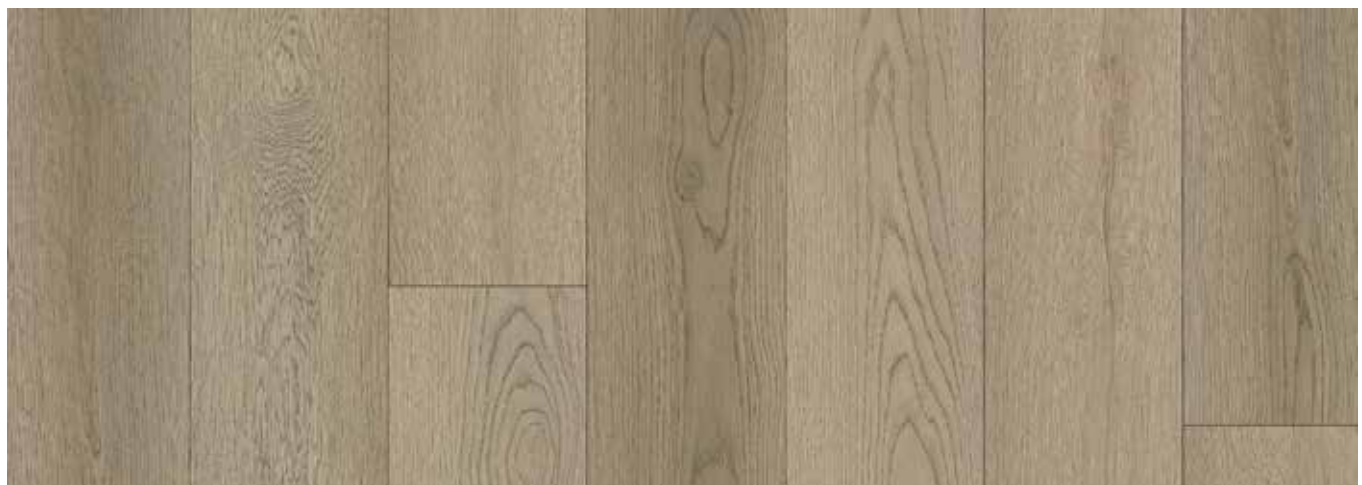

CASTLEWOOD
LUXURY VINYL

DGWP0307
10 MM | 22 MIL

EVC | 10 MM, 22 MIL

Construction	Engineered Vinyl Click (EVC), Waterproof Core
Classification	ASTM F3261
Dimensions	9" Wide x 60" Long, 225 mm x 1500 mm
Overall Thickness	10 mm (Includes 2.0 mm Pad)
Attached Pad	2.0 mm Quiet Cork
Wear Layer	22 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed-In-Register
Edge Profile	4-Sided Painted Bevel
Packaging	21.8 sf/ctn, 6 pc/ctn, 43.6 lbs/ctn, 48 ctn/plt, 1046.4 sf/plt

Installation & Maintenance

Angle / Angle

Layout Room size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services

Phthalate Free

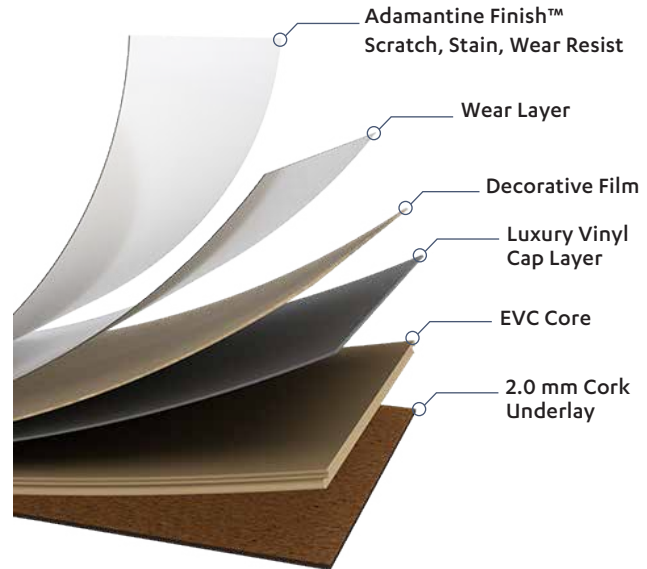


Warranty

30 Year Residential, 10 Year Light Commercial

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNoise](#) Stair Nosing

Layout Options:

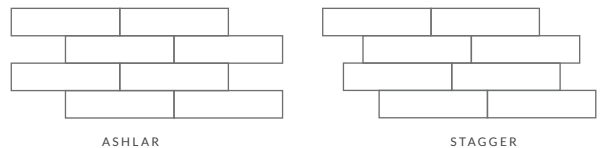

TAS

CONTRACT

ASSOCIATION

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.