

TANDEM CLASSIC



EVC | 7.5 MM, 20 MIL



Acacia | JBTANDEMACAAWT



Ashford | JBTANDEMASH



Dover | JBTANDEMDOV



Oakham | JBTNOAK




Norwich | JBTANDEMNR



Oban | JBTANDEMOBA



Rockport | JBTANDEMROC

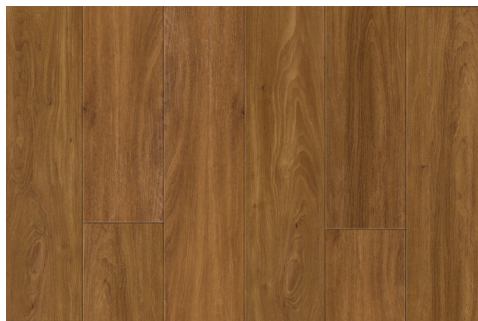

Sussex | JBTANDEMSUS



Bristol | JBTNBRI

SPECIFICATIONS

Construction	Engineered Vinyl Click (EVC) Waterproof Core
Classification	ASTMF F3261, Class III, Type B
Dimensions	5.75" Wide x 48" Long, 146 mm x 1217 mm
Overall Thickness	7.5 mm (includes 2.0 mm EVA pad)
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane, Super Protect Coating
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	15.3 sf/ctn, 8 pcs/ctn, 25 lbs/ctn, 1285.2 sf/plt, 84 ctn/plt
Installation	Angle / Angle
Warranty	30 Year Residential, 10 Year Light Commercial, 10 Year Multifamily

INSTALLATION FAST FACTS

- Transitions required in rooms over 25' x 35' or 875 sf
- Acclimate to Normal Room Conditions (NRC) 65°F - 85°F
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 60%
- Work out of several boxes, mixing product for visual appearance
- Hydro Radiant Heat approved (≤ 85°F)

Read Complete Instructions Before Installing



tasflooring.com

**SPEC SHEET
WARRANTY
INSTALLATION & MAINTENANCE
TRIMS, TRANSITIONS & QNOSE**

