



LUNAR

SPC | 8 MM, 20 MIL

TAS
CONTRACT

TASCONTRACT.COM

LUNAR

SPC | 8 MM, 20 MIL



SUPERIOR MOISTURE PROTECTION

Ideal for multifamily environments, Lunar resists water damage and maintains dimensional stability—thanks to its durable SPC waterproof core and 8.0 mm total thickness.



LONG-LASTING BEAUTY AND DURABILITY

Enhanced scratch resistance and wear performance come from a robust 20 mil wear layer and a polyurethane Gra-matte finish that preserves aesthetic appeal over time.



ELEVATED CONTEMPORARY STYLE

Sleek, upscale visuals that align with modern design standards are achieved through 9" x 60" embossed planks with painted bevel edges.



QUIETER, MORE COMFORTABLE LIVING

Improved sound absorption and underfoot comfort—perfect for reducing noise transfer between units—are delivered by an attached 2.0 mm IXPE pad.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





SOLENE
LUXURY VINYL

DGRC1301
8 MM | 20 MIL



ARTEMIS
LUXURY VINYL

DGRC1302
8 MM | 20 MIL



MANI
LUXURY VINYL

DGRC1303
8 MM | 20 MIL



CHANDRA
LUXURY VINYL

DGRC1304
8 MM | 20 MIL

SPC | 8.0 MM, 20 MIL

Construction	SPC Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	9" Wide x 60" Long (228 mm x 1500 mm)
Overall Thickness	8.0 mm (Includes 2.0 IXPE Pad)
Wear Layer	20 mil
Finish	Polyurethane Gra-matte Finish
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	18.41 sf/ctn, 5 pcs/ctn, 46.9 lbs/ctn, 44 ctn/plt, 810.04 sf/plt

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS Certified

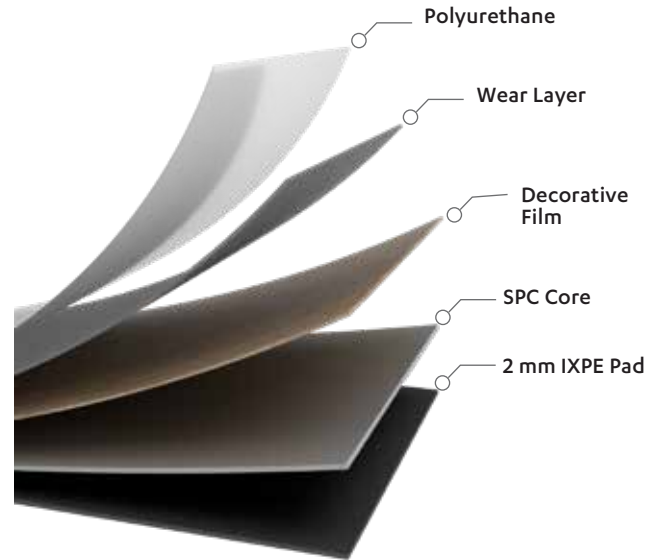



Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-mold, Q Nose

Layout Options:



TAS

CONTRACT

TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.