



ACCLAIM

ABA 4.5 MM | 12 MIL | 7.25" X 48"

TAS
CONTRACT

TASCONTRACT.COM

ACCLAIM

ABA RIGID CORE | 4.5 MM | 12 MIL | 7.25" X 48"



ANTI-MICROBIAL | ANTI-SCRATCH COATING

The Anti-Microbial Polyurethane finish coat gives a >99.9% reduction of bacteria, tested in accordance with ASTM E2180-18.



ABA CONSTRUCTION

The ABA 3-Layered Core construction of Acclaim provides superior dimensional stability in a Rigid Core product.



INDENTATION RESISTANT

Rigid Core products feature a dense, solid core that provides resistance to indentation. Rigid Core flooring solutions address a variety of needs in light commercial and residential spaces.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.



EDGE PROFILE


4-Sided Painted Bevel to enhance plank definition for a realistic wood floor visual.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round


QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



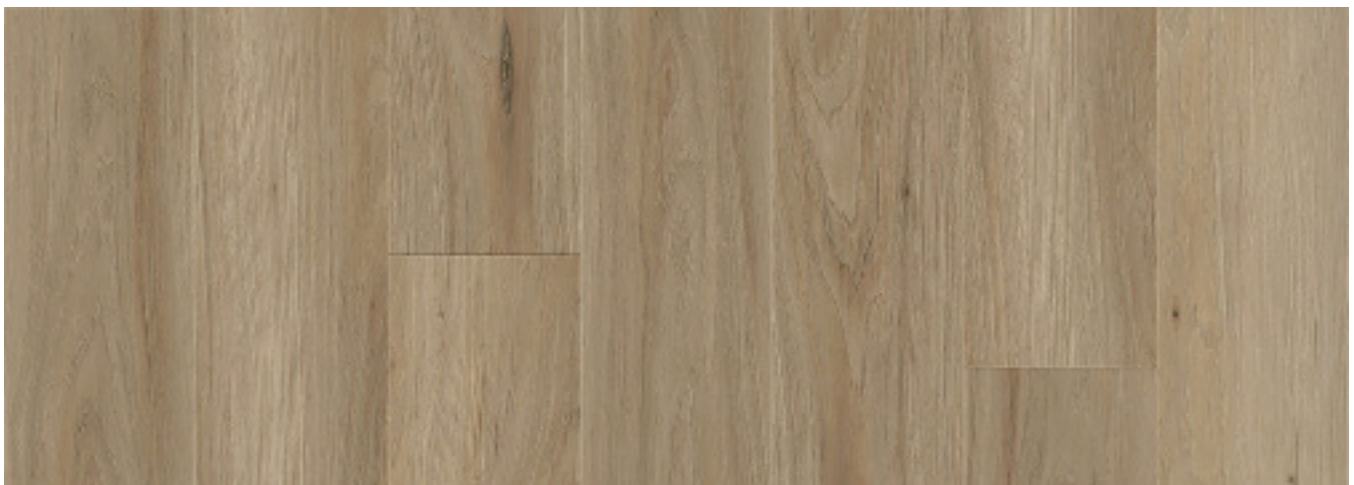

TANUNDA HICKROY
ABA RIGID CORE

WIRCO501
4.5 MM | 12 MIL

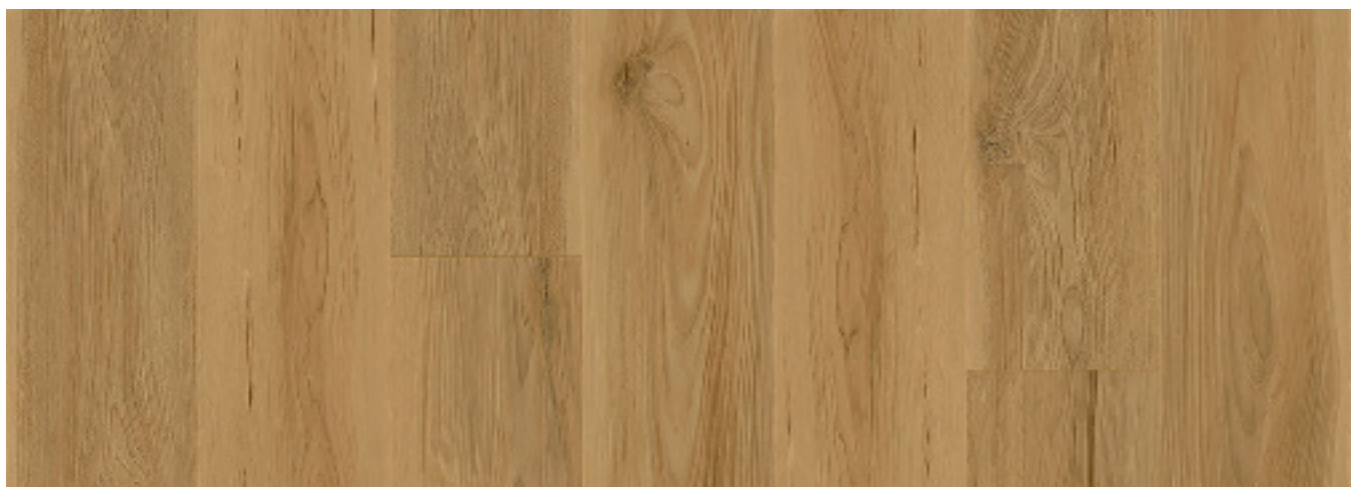


LAGER HICKORY
ABA RIGID CORE

WIRCO502
4.5 MM | 12 MIL



PORTER HICKORY
ABA RIGID CORE

WIRC0503
4.5 MM | 12 MIL

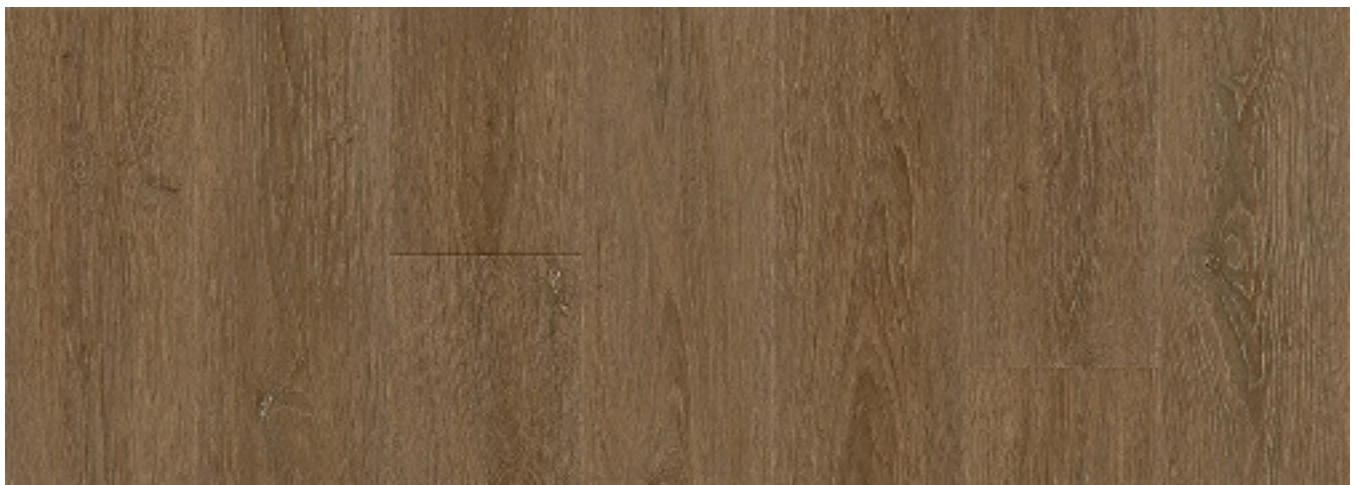

ERDINGER OAK
ABA RIGID CORE

WIRCO504
4.5 MM | 12 MIL



YEBINNA OAK
ABA RIGID CORE

WIRCO505
4.5 MM | 12 MIL



CALLA ACACIA
ABA RIGID CORE

WIRCO506
4.5 MM | 12 MIL

LIFEPROTECT



LAMINATE | 8.0 MM, 2.0 MM ATTACHED PAD

Construction	Water Resistant Laminate Core
Classification	EN 13329
Dimensions	8-1/32" Wide x 47-5/8" Long
Overall Thickness	10 mm (includes 2 mm pad)
Attached Pad	2 mm XPS Acoustical Pad
Wear Surface	AC4
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	18.6 sf/carton - 68 cartons/pallet - 1264.8 sf/pallet 18.6 sf/carton - 72 cartons/pallet - 1339.2 sf/pallet

Installation & Maintenance

Angle / Horizontal Tap

Transition: Transition required for rooms larger than 45' W x 45' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring.

Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

GreenGuard Gold # 232523-420

CARB Phase 2 Compliant

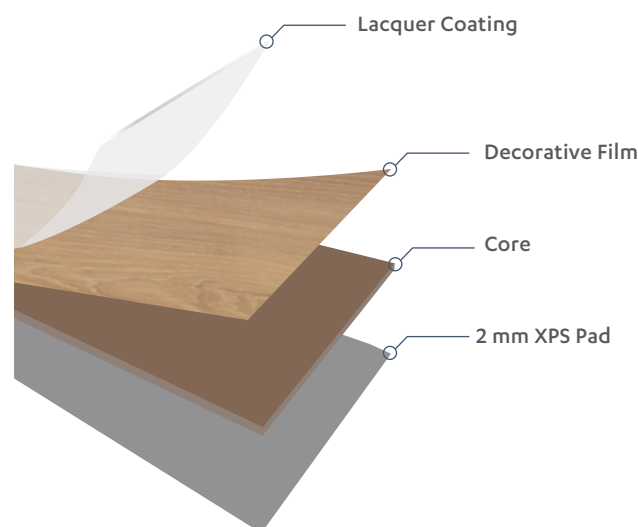

Warranty


10 Yr Light Commercial, 10 Yr Multi-Family, Lifetime Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

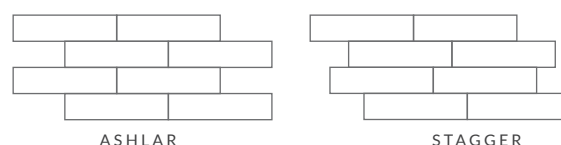

TAS
CONTRACT
TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.