



ACCLAIM

ABA 4.5 MM | 12 MIL | 7.25" X 48"

TAS

CONTRACT

TASCONTRACT.COM

ACCLAIM

ABA RIGID CORE | 4.5 MM | 12 MIL | 7.25" X 48"



ADAMANTINE FINISH™

The Adamantine finish™ coat gives a >99.9% reduction of bacteria, tested in accordance with ASTM E2180-18.



ABA CONSTRUCTION

The ABA 3-Layered Core construction of Acclaim provides superior dimensional stability in a Rigid Core product.



INDENTATION RESISTANT

Rigid Core products feature a dense, solid core that provides resistance to indentation. Rigid Core flooring solutions address a variety of needs in light commercial and residential spaces.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.



EDGE PROFILE

4-Sided Painted Bevel to enhance plank definition for a realistic wood floor visual.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





TANUNDA HICKROY
ABA RIGID CORE

WIRC1501
4.5 MM | 12 MIL



LAGER HICKORY
ABA RIGID CORE

WIRC1502
4.5 MM | 12 MIL



PORTER HICKORY
ABA RIGID CORE

WIRC1503
4.5 MM | 12 MIL



ERDINGER OAK
ABA RIGID CORE

WIRC1504
4.5 MM | 12 MIL



YEBINNA OAK
ABA RIGID CORE

WIRC1505
4.5 MM | 12 MIL



CALLA ACACIA
ABA RIGID CORE

WIRC1506
4.5 MM | 12 MIL

ABA SPC | 4.5 MM, 12 MIL

Construction	ABA Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	7.25" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	5.5 mm (includes 1.5 mm pad)
Attached Pad	1.5 mm Acoustical Pad
Wear Layer	12 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	26.43 sf/ctn, 11 pcs/ctn, 45.7 lbs/ctn, 60 ctn/plt, 1585.8 sf/plt

Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring.

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass>250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services

Hydrophobic Antimicrobial Surfaces ASTM E2180-18 Reduction % >99.9

Phthalate-Free

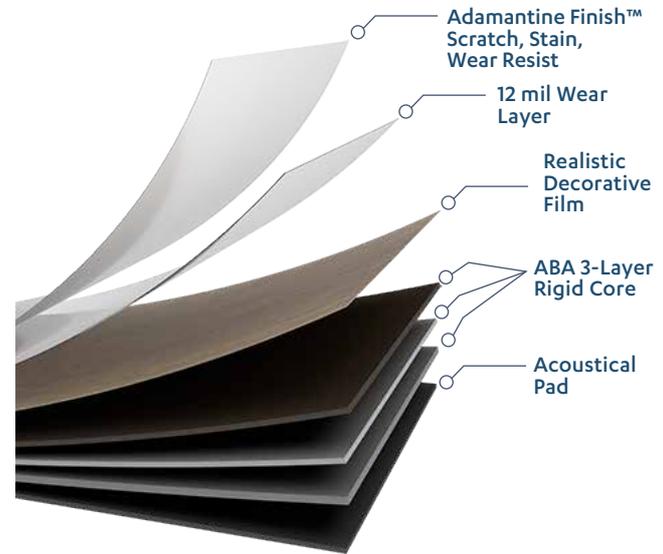

Warranty


5 Yr Light Commercial, 5 Yr Multi-Family, 25 Yr Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

Layout Options:

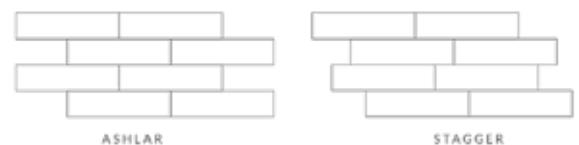





TAS
CONTRACT
TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our TAS Contract custom flooring program.