

AEROCORE WILDS

SPC | 5.5 MM, 20 MIL

| | |
|----------------|--|
| Construction | SPC Rigid Waterproof Core Vinyl Click |
| Classification | ASTM F3261 |
| Dimensions | 7" wide x 48" long, 182 mm x 1220 mm |
| Attached Pad | 1.0 mm IXPE pad |
| Wear Layer | 20 mil |
| Finish | Polyurethane |
| Texture | Embossed |
| Edge Profile | Painted Bevel |
| Packaging | 23.9 sf/ctn, 10 pcs/ctn, 46.3 lbs/ctn, 55 ctn/plt, 1314.5 sf/plt |

Installation & Maintenance

Angle / Angle

Transition: Transition required for rooms larger than: (50) Lx(50)
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: Acclimate product to environment.
Work out of multiple boxes

Maintenance: No Polish, Neutral pH Cleaner

Test Method & Requirements

| | | |
|---|------------------|-----------|
| Classification | ASTM F3261 | Pass |
| Flexibility | ASTM F137 | Pass |
| Thickness (with Pad) | ASTM F386/ (387) | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Stain/Chemical Resistance | ASTM F925 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability w/Exposure to Heat | ASTM F2199 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Pass |
| Static Load | ASTM F970 | Exceeds |
| Static Load Limit | ASTM F970 | >250 |
| Flammability/Radiant Flux | ASTM E648 | 2,000 psi |
| Smoke Density | ASTM E662 | Class I |


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS Certified



Up to 50' x 50'

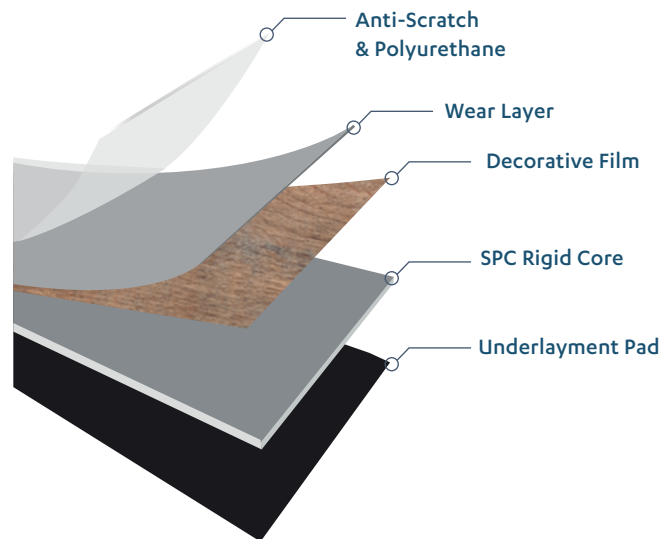

Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

Layout Options:

