

ASTONISHING

 next floor®



SPC 7.5 MM, AC5

Construction	Rigid Core, Stone Polymer Composite
Dimensions	12" Wide x 32" Long
Overall Thickness	7.5 mm (includes 1.5 mm pad)
Attached Pad	1.5 mm Sound Abatement Pad
Wear Surface	AC5
Finish Coat	High Gloss, ScratchMaster™
Texture	Tile Smooth
Edge Profile	Simulated Grout Line
Packaging	20.7 sf/carton - 52 cartons/pallet - 1076.4 sf/pallet

Installation & Maintenance

Angle / 5G Drop

Expansion & Transition: 3/8" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 63 - 75 Degrees Fahrenheit

Maintenance: No Polish, S-330 Once 'n Done Floor Cleaner by Armstrong Flooring

Test Method & Requirements

Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Passed
Coefficient of Friction	ASTM 2047	1.1
Static Load Limit	ASTM F970	Exceeds 3000 lbs
Sound Transmission Class (STC)	ASTM E492	64
Impact Insulation Class (IIC)	ASTM E989	73
High Frequency Impact Insulation Class (HIIC)	ASTM E3222	89


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certified

Phthalate-Free

PVC-Free

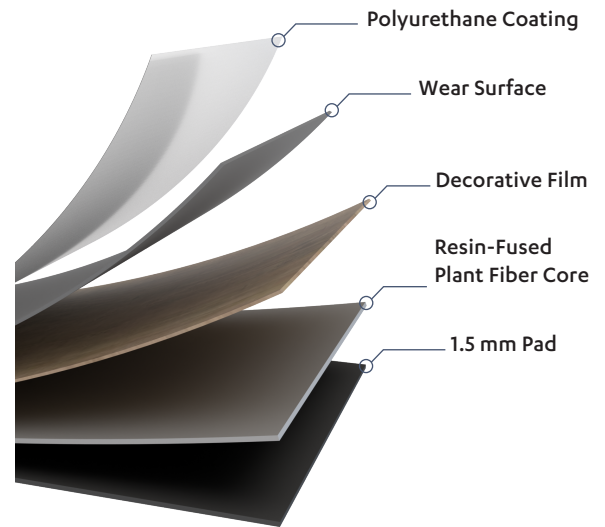

Warranty


Lifetime Residential Topical Water,
10 Yr Residential Stain/Scratch/Pet Resistance

Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER

