

Acczent™

Chambray

HETEROGENEOUS VINYL SHEET

 **Tarkett®**



Durability refined

Chambray fabric has been cherished for centuries for its durability, lightweight comfort, and timeless elegance. Inspired by this iconic French textile, Acczent Chambray brings a sense of familiar warmth to any space, with a broad color palette reminiscent of the European countryside. Now featuring a 32-mil wear layer and advanced Techtonic® XD protection, each surface delivers exceptional resistance to stains, scratches, gouges, and scuffs. And just as chambray is prized for its breathability, this collection is Certified **Asthma & Allergy Friendly®** to support better indoor air quality.

ON COVER:
Acczent Chambray 502 Cambric, 515 Proper, 516 Oxford, 517 Tides In, 519 Covington
Acczent Woods 042 Grey OAK TREE

LEFT:
Acczent Chambray 503 Cotton, 512 Batiste, 515 Proper, 520 Citrus, 521 Vine
Acczent Stones 019 Chalk CONCRETE

We've taken an extra step to protect your floors against stains.

Specifically formulated for Tarkett's vinyl sheet collections, Techtonic XD features excimer defense technology to provide superior stain resistance, scratch protection, without requiring floor finish. By adding an excimer curing to our manufacturing process, we've made sure this ruggedly strong coating extends the life of your floor and maximizes your return on investment.

Immaculate stain defense

Based on third-party testing to ASTM F925, Techtonic XD provides superior stain resistance to all the most challenging chemical and medical staining agents and performs better than a leading competitor against 65% of them.

Better scratch and scuff protection

When it comes to scratches, scuffs, gouges, and tears, Techtonic XD performs at the top of its class, so floors look better and last longer.

Easy to clean

Techtonic XD provides a durable matte finish that remains easy to clean.

No floor finish required

Floors do not require a traditional floor finish, saving time and money.



Chambray


22 colors




Accent Chambray 500 Linen, 513 Fields | Accent Woods 029 Beige CHATILLON OAK




507 Bamboo WB
09 Clay WB *




500 Linen CB
VK8 Sandstorm CB *




504 Natural CB
VL1 Harvest Time CB *




505 Twill WG
32 Pebble WG *




502 Cambric CG
TG2 Shark Fin CG *




516 Oxford
71 Storm Cloud CG *




517 Tides In
58 Windsor Blue *




518 Jeannie
84 Blue Jeans *




519 Covington
VN5 The Blues *




515 Proper
VM5 Dream Teal *




513 Fields
VM4 Green Smoke *




501 Cambrai
VN3 Gecko *




521 Vine
VN3 Gecko *




514 Scarborough
VN4 Green Vista *




512 Batiste
VM2 Shoreline Purple *




511 Berry
VM3 Misted Plum *




510 Reddie
TB6 Flame *




509 Terra
VL9 Red Clay *




508 Sunshine
VM8 Mr Sunshine *



506 Flax
TG7 Canary *



503 Cotton
01 Snow White W *



520 Citrus
VM1 Hot Spice *

000 Color Name
00 Coordinating Color

Wall base coordinates

* We've identified Color Foundations® neutrals in the following way:
WB (Warm Beige), **CB** (Cool Beige), **WG** (Warm Grey), **CG** (Cool Grey),
B (Black), **W** (White).

* Suggested colors for finishing borders (wall base).
Coordinated Johnsonite® accessories are a printed approximation.
Please refer to the Color Guide for accurate color representation.

Tarkett Solution SPEcTrum™

At Tarkett, we believe in placing people in the center of every space. So we’ve developed a portfolio of products designed to work together both functionally and aesthetically, helping you create more supportive spaces that maximize return on investment. Our full palette of colors, patterns, and textures is coordinated to work together visually across product categories—creating the perfect balance for people, planet, and performance.

- 1. Heterogeneous sheet
Accent Chambray 512 Batiste
- 2. Carpet tile & Powerbond® hybrid carpet
Layered Duality™ Grounded Harmony™ A0043
Spirited 24725
- 3. Homogeneous sheet & tile
iQ® Eminent 879 Light Warm Grey
- 4. Johnsonite rubber sports flooring
Inertia® XC1 Ontario
- 5. Johnsonite wall base
Millwork Masquerade Reveal MW-ME5-F
ME5 Seasoned Oak Peppercorn
- 6. Heterogeneous sheet
Accent Stone 025 Terrazzo Concrete Grey
- 7. Heterogeneous sheet
Accent Wood 006 Brushed Oak Medium
- 8. Heterogeneous sheet
Accent Chambray 500 Linen
- 9. Luxury vinyl tile & plank
iD Latitude™ Wood PLWD Hazelwood 7542
- 10. Heterogeneous sheet
Accent Wood 042 Oak Tree Grey
- 11. Vinyl composition tile
Tarkett VCT II 513 Deep Plum
- 12. Homogeneous sheet & tile
iQ Optima® 246 Egyptian Scrolls
- 13. Johnsonite wall base
Millwork Equinox MW-55-R 55 Silver Grey
- 14. Johnsonite stairwell management
AngleFit® Stair Tread VIHNTR-15757 Custom
- 15. Powerbond hybrid carpet
Angled in Enrichment™ Function Found™ 11862
Framework 56707



Color may vary from actual swatch. To order a sample and to learn more, please visit [tarkett.com](https://www.tarkett.com).



Tarkett’s holistic approach to sustainability is woven into the fabric of how we do business and sits at the heart of our day-to-day decision making.

For decades, we’ve been scrutinizing every detail of our business for its impact on resources like soil, water, and air—because when you’re trailblazing a more sustainable future, **every step matters**.

The **proof** is in the numbers.



Circular economy

94%

of our raw materials are third-party assessed for their impact on human and environmental health based on Cradle to Cradle criteria.

69%

of raw materials are abundant, rapidly renewable, or recycled.

13

zero-waste-to-landfill manufacturing plants

2.1 million lb.

of flooring recycled in 2024 in North America



Certifications you can trust

2011

started working with EPEA to integrate Cradle to Cradle principles into every facet of our business

2013

first commercial flooring Certified **Asthma & Allergy Friendly**®

2022

Powerbond® RS is the first soft surface product in the industry to be Certified **Asthma & Allergy Friendly**®.



Transparency you can trust

100ppm

raw materials content revealed down to 100 parts per million

When most manufacturers reveal raw materials content down to just 1,000 ppm, there’s simply no contest.

We’ve been providing Material Health Statements since 2013 to give you peace of mind about the content of our products.



Healthy impacts

99%

of flooring solutions have low VOC emission levels—10x lower than the most stringent world standards.

100%

ortho-phthalate-free vinyl production; first company to eliminate ortho-phthalates from all products



Global excellence

2010

first flooring manufacturer to join the UN Global Compact

2016

Began reporting to the Carbon Disclosure Project (CDP). In 2025, Tarkett scored A, the CDP management level.

2020

first assessment by EcoVadis. In 2025, Tarkett’s score of 86/100 earned us a Platinum medal and placed us in the top 1% of rated companies.

2023

SBTi deemed our target ambition in line with a 1.5°C trajectory, currently the most ambitious designation available through the SBTi process.

Contributing to better indoor air quality

Asthma and allergies affect millions of people every year and have costly implications for people’s health and wellness, finances, and school or work performance. While there is no cure for either condition, one of the best ways to manage them is to avoid triggers of asthma and allergy symptoms.



100 million+

people in the U.S. experience various types of allergies each year

1 in 12

people in the U.S. has asthma

\$50.3 billion

is spent annually for medical treatment of asthma


What does the **Asthma & Allergy Friendly**® certification mean?

Products that are Certified **Asthma & Allergy Friendly**® are scientifically proven to reduce exposure to asthma and allergy triggers and promote better indoor air quality.



VOC emissions

Emissions of Volatile Organic Compounds (VOCs) must be below strict certification limits, at 24 hours and 14 days after flooring is installed. If adhesive is used to fix the flooring in place, it is included in the VOC testing.



Allergen removal

Using recommended cleaning methods, allergen removal must meet or exceed these thresholds:

75%

soft-surface flooring

90%

resilient flooring

Note: Only the Asthma & Allergy Friendly Certification testing considers the entire flooring system—including flooring material, adhesive, cleaning supplies, and effective allergen removal.

Certified flooring solutions

Tarkett is proud to offer a variety of trusted flooring solutions that are Certified **Asthma & Allergy Friendly**®, including Powerbond® RS hybrid carpet, iQ® homogeneous vinyl collections (Granit™, Optima®, Eminent™), iD Latitude™ luxury vinyl tile, and all Acczent™ and Performa™ heterogeneous vinyl collections.



Powerbond RS



iQ Optima



iD Latitude




Acczent



Performa

Tailored by Tarkett™

To help you explore and specify flooring, Tarkett offers design tools and services that make it easier than ever to find inspiration, research product ideas, and try out personalized flooring concepts to help you create profoundly unique spaces. You can even co-create with one of our expert designers to help you fulfill your vision.

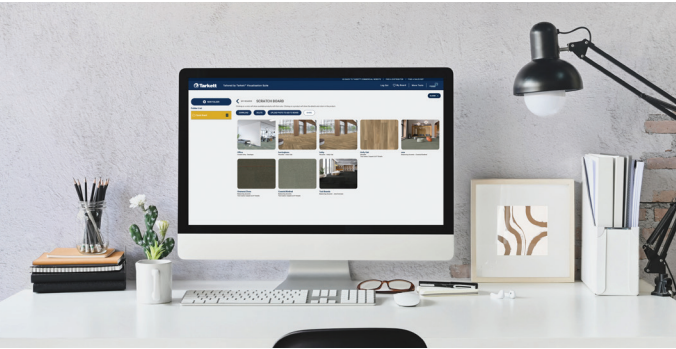

Design tools

Choose from an array of sophisticated design tools to help you tailor and preview each flooring layout. The **Tailored by Tarkett Visualizer Suite** is a user-friendly online platform to help you explore layouts and colorways. With the Visualizer suite, you can:

- Create **project boards** to effortlessly save swatches, collect room scenes, upload photos, and keep all your visuals organized in one convenient place;
- Complete your ideas with our **Wall Base Studio**, which enables you to preview an unlimited selection of high-definition digitally printed wall finishing borders that meet your exact needs.

Of course, your ideas aren't limited to just one type of flooring. That's why our online tools include visualizers for carpet tile, tufted broadloom, Powerbond® hybrid carpet, luxury vinyl tile, non-PVC plank and tile, and rubber tile.



Learn more and find your inspiration here.



Design services

Great flooring supports people, inspires creativity, and connects us to our environment. So does great service. That's why we offer a suite of end-to-end design services to help you. Want to add a logo to your floor or a custom corporate message? No problem. Or maybe you're looking for support in the form of professional renderings to help sell your flooring concept. No matter your need, Tarkett experts are here to help you solve your biggest flooring challenges and deliver personalized solutions.

- Let our **Designer on Demand** team create renderings for you. Simply submit your project online and our designers will create beautiful renderings you can proudly share with your clients.
- Our **Imaginations® Personalized Floor Design** program can help you implement more intricate and detailed designs—such as logos and messaging—adding shape, color, and texture into your floor design with tailored cutting and fabrication.

Weld rod and pattern details

Color #	Color name	Color Foundations*	Solid weld rod	LRV**
500	Linen	CB	24806241	31.2
501	Cambrai		24806242	27.5
502	Cambric	CG	24806243	31.3
503	Cotton		24806244	43.6
504	Natural	CB	24806245	29.6
505	Twill	WG	24806246	28.3
506	Flax		24806247	53.2
507	Bamboo	WB	24806248	42.3
508	Sunshine		24806249	39.1
509	Terra		24806250	24.5
510	Reddie		24806251	20.2
511	Berry		24806252	15.4
512	Batiste		24806253	16
513	Fields		24806254	36.5
514	Scarborough		24806255	17.5
515	Proper		24806256	18.6
516	Oxford		24806257	28.6
517	Tides In		24806258	23.5
518	Jeannie		24806259	24.3
519	Covington		24806260	18.3
520	Citrus		24806261	32.5
521	Vine		24806262	40.1

* See the Color Foundations® key on page 5

** Light Reflectance Value (%)

Key attributes summary



Durable performance

Techtonic XD and 32-mil wear layer provide superior resistance to stains, scuffs, scratches, gouges, and tears



Broad portfolio

A full palette of colors designed to serve a variety of commercial spaces and coordinate with other Acczent collections



Improved hygiene

Thermo-fused welding creates a monolithic surface



Static load limit

Static load limit of 2000 PSI (Modified ASTM Testing**)



Ease of maintenance

No floor finish required*, reducing maintenance costs and optimizing return on investment



Warranty protection

Backed by a top-of-class 15-year warranty



Immediate occupancy

Tarkett RollSmart™ adhesive is approved for use under hospital beds, shortens installation times, and allows immediate welding and traffic




Indoor air quality

Certified **Asthma & Allergy Friendly®**

* With the proper combination of cleaning products, pads, accessories, equipment, and frequency (based on the type of soil and volume), the floor can be easily maintained without the use of floor finish.

Heterogeneous sheet construction

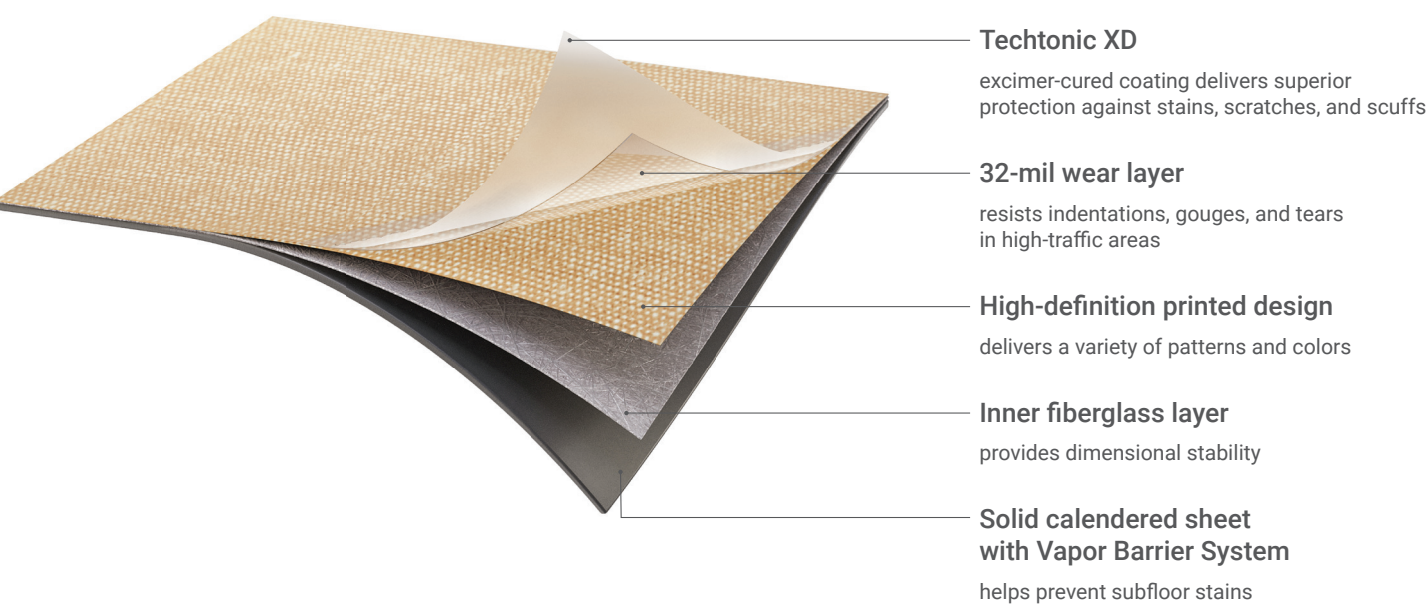

Specifications

HETEROGENEOUS VINYL SHEET

Style name	Accent Chambray
Warranty	15 years
Colors available	22
Thickness	0.08" (2 mm)
Wear layer thickness	0.032" (0.8 mm)***
Formats	Roll
Roll size	Approx 76' (23 m) L x 6'6" (2 m) W
Roll weight	5.7 lb./ sq. yd (3.1 kg/m²)
Installation type	Glue down

*** Wear layer thickness tested to ISO SPEC 24340

Testing

Technical Data	Standards	Acczent	
Classification	ASTM F1303	Heterogeneous vinyl sheet	
Polyurethane Reinforced		Techtonic XD	
Static Load Resistance	ASTM F970	250 psi, ≤ 0.005" Modified 2000 psi: ≤ 0.005" **	** Static loads greater than 250 psi fall outside of the scope of the ASTM F970 test method. Modified static load testing does not provide information related to the long-term exposure and the residual indentation of an installed floorcovering system which includes the subfloor, adhesive, underlayment, and cementitious patching/leveling compounds. Residual indentation(s) may remain visible in any resilient flooring installation, however, overhead lighting, natural lighting and the application of a gloss floor finish may increase the appearance.
Residual Indentation	ASTM F1914	Passes	
Slip Resistance	ASTM D2047	≥ 0.5 SCOF	
Flammability	ASTM E648	Class 1 (≥ 0.45 W/cm²)	
Smoke Density	ASTM E662	Passes (<450)	
Canadian Fire Testing	CAN/ULC S102.2	FSR 145 / SDC 235	
Chemical Resistance	ASTM F925	Passes	
Resistance to Light	ASTM F 1515	ΔΣ ≤ 8	
Resistance to Heat	ASTM F 1514	ΔΣ ≤ 8	
Flexibility	ASTM F137	Passes	

Sustainability attributes

ACCZENT HETEROGENEOUS SHEET

Product emissions decarbonization:
ClimeCo Certified Product™ decarbonization program available upon request

Healthy materials:
94% raw materials third-party assessed; ortho-phthalate-free

Indoor air quality:
FloorScore® certified*; Certified **Asthma & Allergy Friendly®** (Acczent)
*Meets California Department of Public Health (CDPH) for low emitting materials Standard Method v1.2-2017

Transparency documents available:
Product-specific EPD; Material Health Statement

Responsible end of use management:
Part of Tarkett's ReStart® take-back and recycling program



Transparency documentation

At Tarkett, transparency, social responsibility and environmental stewardship aren't add-ons—they're part of everything we do. By partnering with ecomedes and mindful MATERIALS, we make it easy for you to explore our sustainable flooring product options, their product certifications, green building systems and federal standards support documents. Visit tarkett.ecomedes.com to learn more.





ReStart is Tarkett's take-back and recycling program.



To learn more about the **ReStart** program, scan the QR code or go to commercial.tarkett.com/Restart

For more accurate color and pattern representation, we suggest you visit an authorized Tarkett dealer to view an actual product sample. All third-party trademarks are the property of their respective owners.

©Tarkett North America 21699000012 03/2026

