

WOODHAVEN

SPC | 5.0 MM, 20 MIL

Construction	SPC Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	9" Wide x 60" Long (232 mm x 1532 mm)
Pattern Repeat	300 sq/ft
Overall Thickness	5.0 mm (Includes 1.0 mm IXPE Pad)
Wear Layer	20 mil
Finish	Aluminum Oxide Finish
Texture	Digital Embossed-In-Register
Edge Profile	Painted Bevel
Packaging	26.78 sf/ctn, 7 pcs/ctn, 47.1 lbs/ctn, 44 ctn/plt, 1178.4 sf/plt

Installation & Maintenance

Angle / Drop & Tap Ends

Transition Required for rooms Larger than: 80' L x 80' W
Minimum expansion space to all vertical substrates 1/4"


Ambient & Surface:

- Acclimate product to environment
- Mix planks from multiple boxes during installation
- Subfloor must be dry and level (max 3/16" variation over 10')
- Compatible with radiant heat systems (water-based only)
- Maximum radiant heat temperature: 85°F (29°C)

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load Limit	ASTM F970	0.005in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

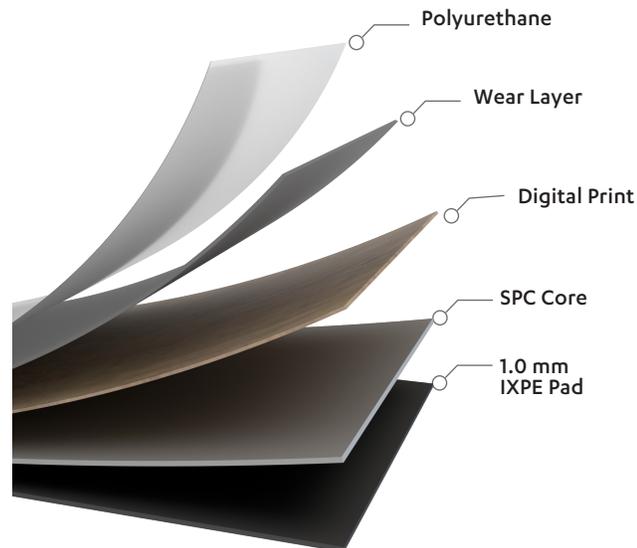


Warranty

10 Year Light Commercial, Lifetime Residential

Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-mold, Q Nose

Layout Options:

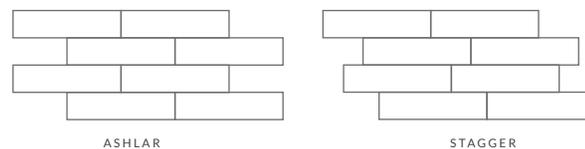

Health & Environment

FloorScore SCS Certified

