



ODYSSEY

GLUE DOWN | 3.0 MM, 20 MIL

TAS

CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

ODYSSEY

GLUE DOWN | 3.0 MM, 20 MIL | 7.25" X 48"



EMBOSSSED-IN-REGISTER (EIR) TECHNOLOGY

The Odyssey Collection features EIR technology, which provides texturing that follows the wood graining of the design print layer, resulting in incredibly realistic wood visuals. This attention to detail enhances the overall aesthetic and authenticity of the flooring.



CURLING PREVENTION TECHNOLOGY

Equipped with a curling prevention balance layer and two stabilization core layers, the Odyssey Collection ensures stability and durability, minimizing the risk of curling or warping over time. This advanced technology offers peace of mind for long-term performance.



COMMERCIAL-GRADE PERFORMANCE

Ideal for offices and retail environments, the Odyssey Collection boasts a 20 mil wear layer that offers commercial-grade performance, making it suitable for high-traffic areas. For homeowners seeking extra-tough flooring, this product is the perfect choice, delivering durability and style that stands the test of time.

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





BALBOA
GLUE DOWN

NOLV0201
3.0 MM | 20 MIL



MONACO
GLUE DOWN

NOLV0202
3.0 MM | 20 MIL



CAPETOWN
GLUE DOWN

NOLV0203
3.0 MM | 20 MIL



HAVANNA
GLUE DOWN

NOLV0204
3.0 MM | 20 MIL



SORRENTO
GLUE DOWN

NOLV0205
3.0 MM | 20 MIL



ZURICH
GLUE DOWN

NOLV0206
3.0 MM | 20 MIL



ORIA
GLUE DOWN

NOLV0207
3.0 MM | 20 MIL



LISBON
GLUE DOWN

NOLV0208
3.0 MM | 20 MIL

GLUE DOWN | 3.0 MM, 20 MIL

Construction	Solid Luxury Vinyl
Classification	ASTM F1700, Class III, Type B
Dimensions	7.25" Wide x 48" Long, 183 mm x 1220 mm
Overall Thickness	3.0 mm
Attached Pad	N/A
Wear Layer	20 mil
Finish Coat	Polyurethane Glass Bead
Texture	Embossed-In-Register
Edge Profile	4-Sided Micro-Bevel
Packaging	34.9 sf/ctn, 15 pcs/ctn, 40 lbs/ctn, 50 ctn/plt, 1745 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as Fresh Floors by TAS Flooring.


Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set
- Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Slip Resistance	DIN 51130	Angle: 18.7° Rating: R10

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

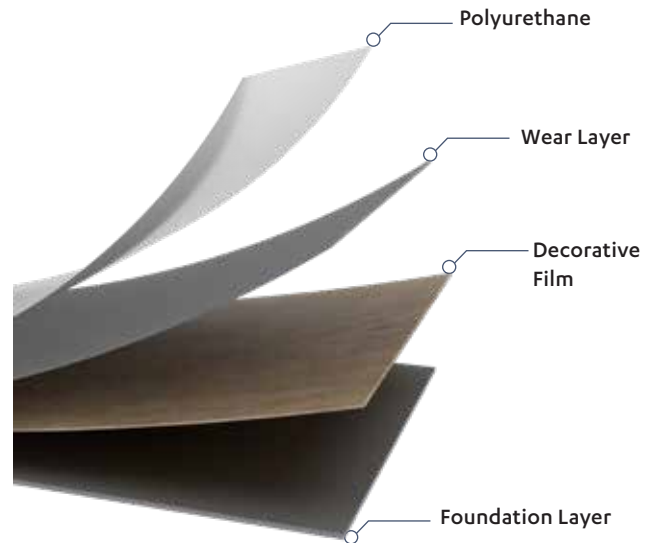


Warranty


10 Year Commercial, 30 Year Multifamily, 30 Year Residential

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET

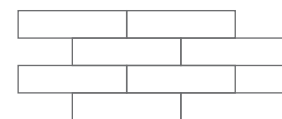

ASHLAR

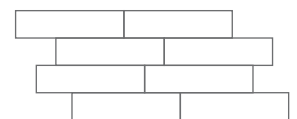

STAGGER



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.