



# VIRTUE

GLUE DOWN | 2.0 MM, 12 MIL

**T A S**  
CONTRACT

[TASCONTRACT.COM](https://TASCONTRACT.COM)

# VIRTUE

GLUE DOWN | 2.0 MM, 12 MIL



## ECO-FRIENDLY CORE CONSTRUCTION

Virtue features innovative stabilization layers that deliver exceptional dimensional stability while maintaining eco-conscious standards, ensuring a sustainable flooring solution for multifamily spaces.




## PROTECTIVE ANTI-BACTERIAL FINISH

Engineered with a PU coating, Virtue's surface provides a strong, safe, and antibacterial layer, making it both durable and human-health-friendly.



## REFINED AESTHETIC & DESIGN

The Virtue Collection features a thoughtfully curated color palette with sophisticated wood visuals, offering timeless elegance and versatility for multifamily spaces.



## BUILT FOR STRENGTH AND STABILITY

Virtue's dual-layer surface technology and robust core structure ensure lasting durability, making it an ideal choice for light commercial and multifamily environments.

*All styles available in a PVC-Free 2.5 mm construction through the EverEco Collection.*

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**WINONA**  
LUXURY VINYL

NOLV0501  
2.0 MM | 12 MIL



**WAYNE**  
LUXURY VINYL

NOLV0502  
2.0 MM | 12 MIL



**TUPELO**  
LUXURY VINYL

NOLV0503  
2.0 MM | 12 MIL



**GRAFTON**  
LUXURY VINYL

NOLV0504  
2.0 MM | 12 MIL



**ALMA**  
LUXURY VINYL

NOLV0505  
2.0 MM | 12 MIL



**DIXON**  
LUXURY VINYL

NOLV0506  
2.0 MM | 12 MIL



**TURLOCK**  
LUXURY VINYL

NOLV0507  
2.0 MM | 12 MIL



**PARNELL**  
LUXURY VINYL

NOLV0508  
2.0 MM | 12 MIL

## GLUE DOWN | 2.0 MM, 12 MIL

|                      |   |
|----------------------|---|
| Construction         | Luxury Vinyl Tile   |
| Classification       | ASTM F1700  |
| Dimensions (nominal) | 7" Wide x 48" Long, 177.8 mm x 1219.2 mm                        |
| Overall Thickness    | 2.0 mm  |
| Wear Layer           | 12 mil  |
| Finish Coat          | Polyurethane  |
| Texture              | Embossed  |
| Edge Profile         | Square Edge   |
| Packaging            | 51.33 sf/ctn, 22 pcs/ctn, 36 lbs/ctn, 50 ctn/plt, 2566.5 sf/plt |

### Installation & Maintenance

#### Glue Down

Ambient & Surface Temperature at Installation: Acclimate product to environment.


Maintenance: Subfloors dry and flat (3/16" in 10'). Approved over in-floor Radiant Heat, all methods. Max temp. 85 degrees.

Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set  
- Pinnacle, Premium Transitional Pressure Sensitive, hard set

### Test Method & Requirements

|   |            |                             |
|---|------------|-----------------------------|
| Solid Vinyl Floor Tile                          | ASTM F1700 | Pass                        |
| Flexibility                                     | ASTM F137  | Pass                        |
| Thickness                                       | ASTM F386  | Pass                        |
| Wear Layer Thickness                            | ASTM F410  | Pass                        |
| Resistance to Heat Color Change                 | ASTM F1514 | Pass                        |
| Resistance to Light Color Change                | ASTM F1515 | Pass                        |
| Residual Indentation                            | ASTM F1914 | Pass                        |
| Size & Squareness                               | ASTM F2199 | Pass                        |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard            |
| Static Load Limit                               | ASTM F970  | Pass > 250 LBS              |
| Flammability/Radiant Flux                       | ASTM E648  | Class I                     |
| Smoke Density                                   | ASTM E662  | Pass                        |
| Slip Resistance                                 | DIN 51130  | Angle: 18.7°<br>Rating: R10 |

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

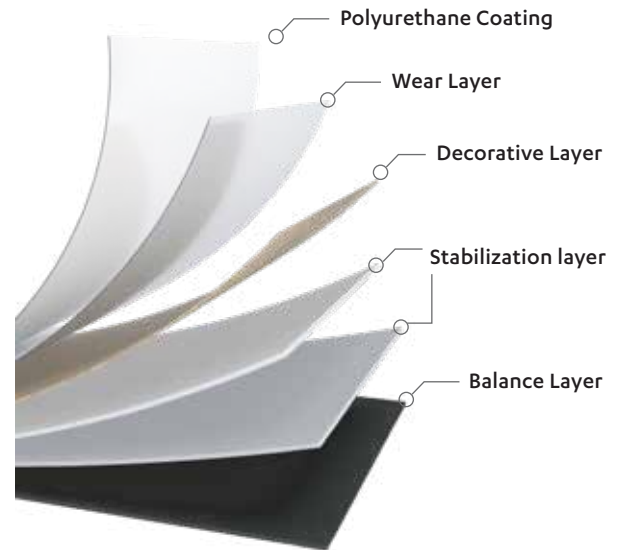


### Warranty


5 Yr Light Commercial/MultiFamily Common Areas, 25 Yr Residential/MultiFamily Residence

### Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER

### Health & Environmental

FloorScore SCS Certified  
Phthalate-Free



T A S

CONTRACT

TASCONTRACT.COM



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our TAS Contract custom flooring program.