



# AXIOM

AC3 | 8 MM + 2.0 MM

**TAS**  
CONTRACT

TASCONTRACT.COM

# AXIOM

AC3 | 8 MM + 2.0 MM



## WEAR SURFACE

Protected by a melamine wear layer with an AC3 rating, Axiom is designed for heavy residential and light commercial applications, offering reliable performance in high-use spaces.



## PAINTED BEVEL

Increases the wood appearance, adding more detail and dimension to the flooring surface.



## TRIPLE WATER-RESISTANT PROTECTION

Engineered with a low-swell core, wax-infused edge sealant, and watertight locking system, Axiom provides three levels of defense against moisture for added peace of mind.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**KINDRID**  
LAMINATE

**DWLA0101**  
8 MM + 2.0 MM



**WHIST**  
LAMINATE

**DWLA0102**  
8 MM + 2.0 MM



**SOLACE**  
LAMINATE

**DWLA0103**  
8 MM + 2.0 MM



**HAVEN**  
LAMINATE

**DWLA0104**  
8 MM + 2.0 MM



**REPOSE**  
LAMINATE

**DWLA0105**  
8 MM + 2.0 MM



**MYSTIC**  
LAMINATE

**DWLA0106**  
8 MM + 2.0 MM



**WHITE HORIZON**  
LAMINATE

**DWLA0107**  
8 MM + 2.0 MM

## WATERPROOF AC3 | 8 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	7.75" Wide x 48" Long (196 mm x 1215 mm)
Overall Thickness	10 mm (Includes 2 mm IXPE Pad)
Attached Pad	2 mm Premium IXPE Pad
Surface Finish	AC3
Texture	Standard
Edge Profile	4-Sided Painted Bevel
Packaging	30.785 sf/plt, 12 pcs/ctn, 47.84 lbs/ctn, 30 ctn/plt, 923.6 sf/plt

### Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40


### Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

Carb Phase II Compliant  
GreenGuard Gold

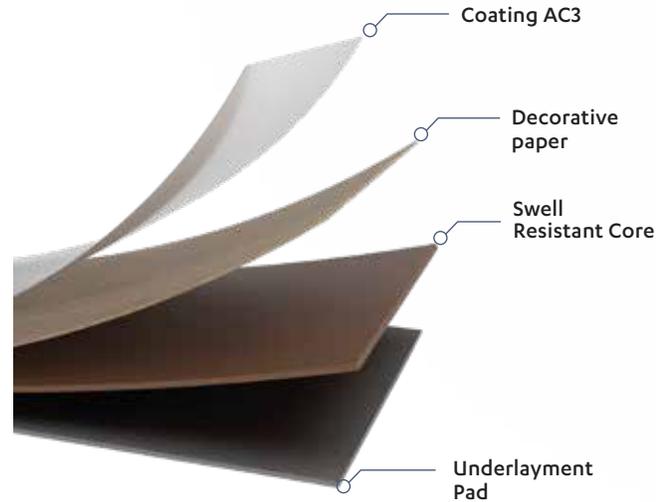

### Warranty


Waterproof, 25 Year Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round  
[QNose](#) Stair Nose

### Layout Options:

NOT TO SCALE

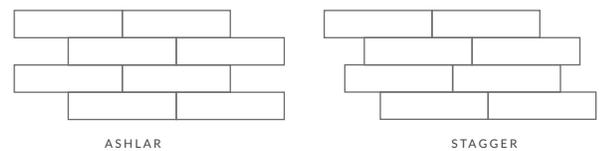

T A S

CONTRACT

TASCONTRACT.COM



PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our TAS Contract custom flooring program.