



## LAMINATE 8.0 MM + 2 MM ATTACHED PAD



**Buttermilk\*** | UMLI22081

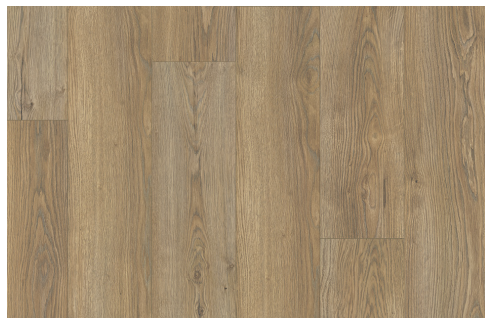

**Monarch Oak\*** | UMLI22082

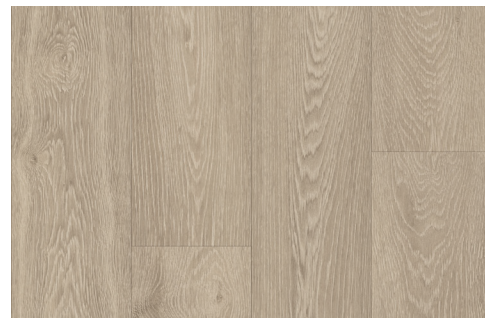


**Gold Creek\*** | UMLI22084



**Yellowstone\*** | UMLI22085




**Miller Lake** | UM162542204

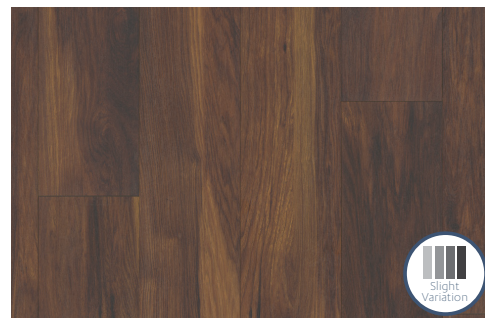

**Sauble Beach** | UM162542205



**Simcoe** | UM162542207

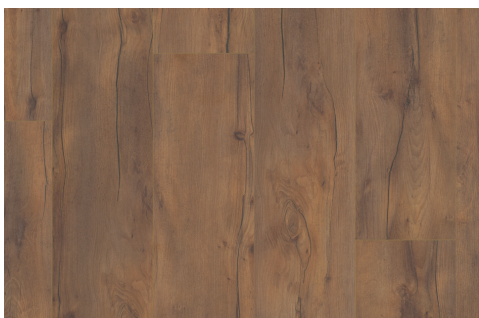

**Oberlin** | UM162542208

### SPECIFICATIONS

Construction	8 mm Water Resistant Core Laminate + 2 mm XPS Attached Pad
Dimensions	8-1/32" Wide x 47-5/8" Long
Overall Thickness	10 mm (includes 2 mm XPS pad)
Wear Surface	AC4 Rating
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	18.6 sf/carton - 68 carton/pallet - 1264.8 sf/pallet
*Packaging	18.6 sf/carton - 72 carton/pallet - 1339.2 sf/pallet
Installation	Angle / Horizontal Tap
Warranty	Lifetime Residential, 10 Yr Light Commercial, 10 Yr Multi-Family

### INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Leave 3/8" expansion for areas over 25'
- Transitions required for rooms larger than 45'L or 45"W
- Subfloors dry and flat (3/16" in 10')
- Installation on or below grade concrete requires 6 mil moisture barrier

Read Complete Instructions Before Installing



tasflooring.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**



Made in the  
**USA**



Additional Specifications, Full Installation Instructions & Warranty Information Available Online

tasflooring.com | a division of **TAS supply company, Inc.**