



BACCARAT

AC4 | 10 MM + 2.0 MM PAD

TAS
CONTRACT

TASCONTRACT.COM

BACCARAT

AC4 | 10 MM + 2.0 MM PAD



DURABLE WEAR LAYER

Protected by a melamine wear layer with an AC4 rating, Baccarat is designed for every kind of residential use and more heavily tracked commercial spaces.



TRIPLE WATER-RESISTANT PROTECTION

Engineered with a low-swell core, wax-infused edge sealant, and watertight locking system, Baccarat provides three levels of defense against moisture for added peace of mind.



PREMIUM CORE TECHNOLOGY

Built with low-porosity, swell-resistant core construction, ensuring long-term dimensional stability and superior resistance compared to standard laminate options.



ENHANCED UNDERLAYMENT

Integrated premium underlayment delivers improved sound absorption, comfort underfoot, and easier installation in multifamily and light commercial settings.



FINISH LAYER

Baccarat features Embossed-in-Register (EIR) technology with low luster realism, delivering a refined, authentic wood look that enhances both texture and visual depth.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





ARISTIDES
LAMINATE

DWLA0201
10 MM + 2.0 MM PAD



BARTON
LAMINATE

DWLA0202
10 MM + 2.0 MM PAD



WHITNEY
LAMINATE

DWLA0203
10 MM + 2.0 MM PAD



CANFIELD
LAMINATE

DWLA0204
10 MM + 2.0 MM PAD



ASCOT
LAMINATE

DWLA0205
10 MM + 2.0 MM PAD



OAKLEY
LAMINATE

DWLA0206
10 MM + 2.0 MM PAD



AINTREE
LAMINATE

DWLA0207
10 MM + 2.0 MM PAD



BELMONT
LAMINATE

DWLA0208
10 MM + 2.0 MM PAD



HASKELL
LAMINATE

DWLA0209
10 MM + 2.0 MM PAD



WOODWARD
LAMINATE

DWLA0210
10 MM + 2.0 MM PAD

WATERPROOF AC4 | 10 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	9.25" Wide x 72" Long (238 mm x 1830 mm)
Overall Thickness	12 mm (Includes 2 mm Pad)
Attached Pad	2 mm Premium IXPE Pad
Surface Finish	AC4
Texture	Embossed In Register
Edge Profile	4-Sided Painted Bevel
Packaging	23.47 sf/ctn, 5 pcs/ctn, 45.1 lbs/ctn, 52 ctn/plt, 1220.4 sf/plt

Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40

Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass


Impact Insulation Class IIC	ASTM E492*
Sound Transmission Class STC	ASTM E90*

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services

Carb Phase II Compliant

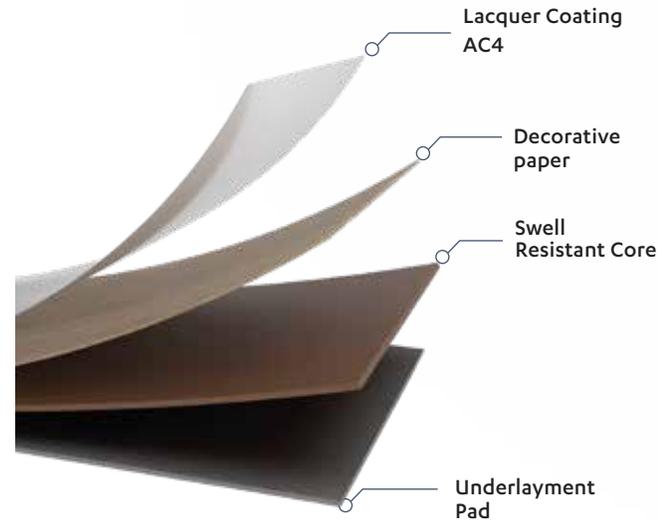

Warranty


Waterproof, 15 year Light Commercial, Lifetime Residential

Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNose](#) Stair Nose

Layout Options:

NOT TO SCALE



ASHLAR



STAGGER



TAS

CONTRACT

TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.