

# VISTA TILE



SPC | 5.0 MM, 12 MIL




**Rattlesnake Ridge** | NFRC0304



**Ocean View** | NFRC0303



**Lookout Point** | NFRC0301

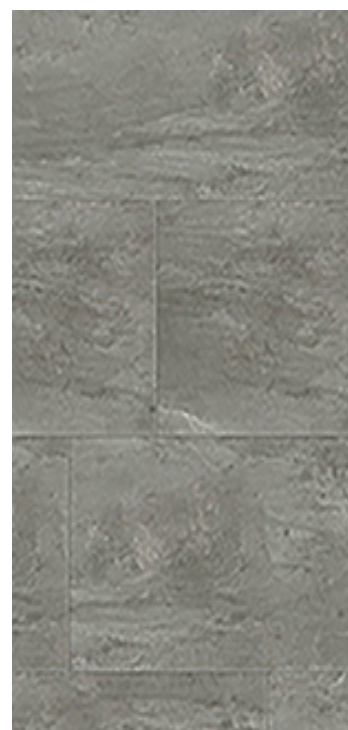

**Scenic Byway** | NFRC0302

## SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class I, Type B, Grade 2, Class B
Dimensions	12" Wide x 24" Long (305 mm x 610 mm)
Overall Thickness	5 mm (includes 1 mm Pad)
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	24.03 sf/ctn, 12 pcs/ctn, 42 lbs/ctn, 54 ctn/plt, 1298 sf/plt
Installation	Angle/Angle
Warranty	5 Year Light Commercial, 5 Year Multifamily, 25 Year Residential

## INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Recommended Room Temp: 60°F-85°F after install
- Expansion Space: 1/4" gap
- Transition required for rooms larger than 50'W x 50'L
- Subfloors dry and flat (3/16" in 10')

Read Complete Instructions Before Installing



tasflooring.com

**SELL SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**

